# **SPECIFICATIONS**

PRODUCT : LCD MODULE

MODEL NO.: S69508B-DB025MB

CUSTOMER NO.: DS11005196

|          | SUCCESS |          | CUSTOMER  |
|----------|---------|----------|---|
| PREPARED | CHECKED | APPROVED | APPROVED  |
| XiangGS  | ZengZP  | WangYF   | FOR APPROVAL  MC TRONIC  MC Tronic s.r.l societa unipersonale Via Novara, 35 28010 VARPIO D'AGOGNA (NO)       |
| 4        |         |          | VA.T. code 02248180032 Tel. +39 0323 86931 - Fax +39 0323 869322 E-mail: info@mctronic.it R.E.A. NO N. 224576 |

DAPPROVAL FOR SPECIFICATIONS ONLY

712 11

■APPROVAL FOR SPECIFICATIONS AND SAMPLE

# 深圳市宇顺电子股份有限公司

#### SUCCESS ELECTRONICS LTD

"Not to use the substances and their applications of SUCCESS Management Standard for Environment-related Substances to be Controlled"

Address:Block 21-23, Changxing industrial Estate u, Changzhen village, Gongming town, ,Shenzhen,China Tel: +86-755-27179653-2790



# **RECORDS OF REVISION**

| DATE      | REVISED NO. | REVISED DESCRIPTIONS         | PREPARED | CHECKED      | APPROVED |
|-----------|-------------|------------------------------|----------|--------------|----------|
| 2021-12-9 | 01          | New release                  | Xianggs  | Zengzhaopeng | WangYF   |
| 2022-2-14 | 02          | Item 8.0:Update initial code | Xianggs  | Zengzhaopeng | WangYF   |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |
|           |             |                              |          |              |          |



| STANDARD |       |     | S69508B-DB025MB  | PAGE | 3/27 |
|----------|-------|-----|------------------|------|------|
| DOC.     | SPEC. | NO. | 507500D-DD025N1D | IAGE | 5/2/ |

# **CONTENTS**

| 1. GENERAL SPECIFICATIONS                  | 4  |
|--|----|
| 2.BLOCK DIAGRAM                            | 5  |
| 3.OUTLINE DRAWING                          | 6  |
| 4. INTERFACE ASSIGNMENT                    | 7  |
| 5.APPLICATION CIRCUIT                      | 8  |
| 6. TIMING CHARACTERISTICS                  | 9  |
| 7. POWER ON/OFF SEQUENCE                   | 12 |
| 8. RECOMMENDED INITIAL CODES               | 14 |
| 9. INSTRUCTION TABLE                       | 15 |
| 10.ELECTRICAL CHARACTERISTICS              | 16 |
| 11. LED BACKLIGHT                          | 17 |
| 12. OPTICAL CHARACTERISTICS                | 18 |
| 13. ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS | 20 |
| 14. RELIABILITY TEST                       | 20 |
| 15. THE STANDAND OF INSPECTION             | 21 |
| 16. USING LCD MODULES                      | 24 |



| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | 4/27 |
|---------------|------------------|---------------|-----------------|------|------|
|---------------|------------------|---------------|-----------------|------|------|

#### 1. GENERAL SPECIFICATIONS

#### 1-1.DESCRIPTION:

The S69508B-DB025MB is a dot matrix mono Liquid Crystal Display Module(LCM). This specification covers the delivery requirements for the liquid crystal display delivered by SUCCESS ELECTRONIC to Customer.

#### 1-2. FEATURES

(1) Display Type: STN Blue, Negative, Transmissive, 12O'clock

(2) Driving Method: VDD=3.3V, 1/65 duty, 1/9 bias

(3) Built-in controller: ST7567(4) With White Backlight


#### 1-3.GENERAL SPECIFICATION

| ITEM               | SPECIFICATIONS                               | UNIT |
|--------------------|--|------|
| DISP.CONSTRUCTION  | 128*64 Dots                                  |      |
| OUTLINE DIMEMSIONS | 67.15(W)*48.15(H)*5.30(T)( Not Included FPC) | mm   |
| VIEWING AREA       | 60.00(W) x31.40(H)                           | mm   |
| ACTIVE AREA        | 57.57(W) x 28.77(H)                          | mm   |
| DOT SIZE           | 0.42(W) x 0.42(H)                            | mm   |
| DOT PITCH          | 0.45(W) x 0.45(H)                            | mm   |
| ASSY.TYPE          | COG+FPC+BL                                   |      |
| INTERFACE          | 6800/SPI                                     |      |
| BACKLIGHT          | White  |      |




| 1             |                  |               |                 |      |      |
|---------------|------------------|---------------|-----------------|------|------|
| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | 5/27 |

#### 2. BLOCK DIAGRAM

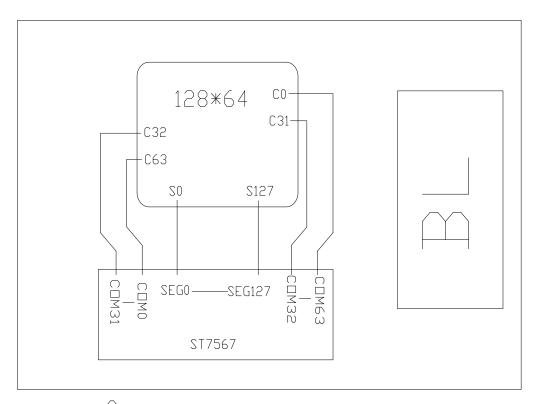

ω ()



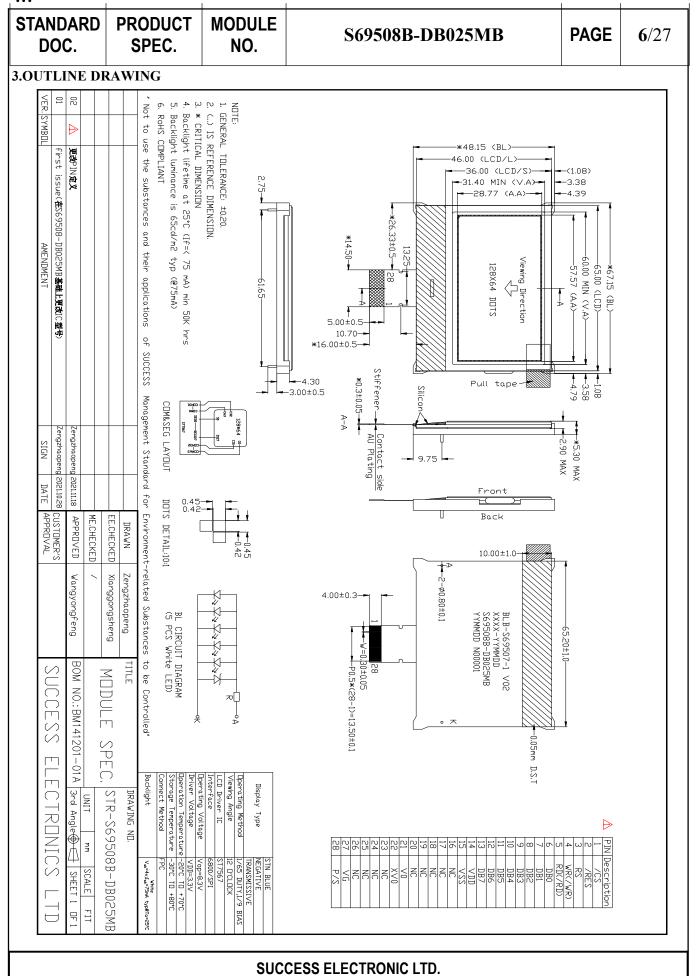




| •               |  |                                      |                                    |      |             |  |  |
|-----------------|--|--------------------------------------|------------------------------------|------|-------------|--|--|
| TANDARI<br>DOC. | PRODUCT<br>SPEC.                             | MODULE<br>NO.                        | S69508B-DB025MB                    | PAGE | <b>7</b> /2 |  |  |
| NTERFAC         | E ASSIGNMENT                                 |                                      |                                    |      |             |  |  |
| 1               | Chip select input                            | pin                                  |                                    | /CS  |             |  |  |
| 2               | Reset input pin                              |                                      |                                    |      |             |  |  |
| 3               | Data/instruction s                           | selection pin                        |                                    | RS   |             |  |  |
| 4               | Read/Write signa When R/W = "1 When R/W = "1 | H": Read                             |                                    | WR   | (/WR)       |  |  |
| 5               | Enable signal, sta                           | Enable signal, start data read/write |                                    |      |             |  |  |
| 6~13            | 8 bit data Bus Lir                           | B bit data Bus Line                  |                                    |      |             |  |  |
| 14              | Logic power supp                             | Logic power supply, +3.3V            |                                    |      |             |  |  |
| 15              | Ground, 0V                                   |                                      |                                    |      |             |  |  |
| 16~20           | NO CONNECT                                   |                                      |                                    | NC   |             |  |  |
| 21              | V0 is the LCD dr                             | iving voltage for co                 | ommon circuits at negative frame   | V0   |             |  |  |
| 22              | XV0 is the LCD                               | driving voltage for                  | common circuits at positive frame. | XV(  | )           |  |  |
| 23~26           | NO CONNECT                                   |                                      |                                    | NC   |             |  |  |
| 27              | VG is the LCD d                              | riving voltage for se                | egment circuits                    | VG   |             |  |  |
| 28              | This pin configur                            | es the interface to p                | parallel mode or serial mode.      | P/S  |             |  |  |



| STANDARD | DRODUCT | MODULE |                 |      |              |
|----------|---------|--------|-----------------|------|--------------|
| DOC.     | SPEC.   | NO.    | S69508B-DB025MB | PAGE | <b>8</b> /27 |
|          |         |        |                 |      |              |

#### **5.APPLICATION CIRCUIT**

The recommended external power components need only 2 capacitors. The detailed values of these two capacitors are determined by the panel size and loading.

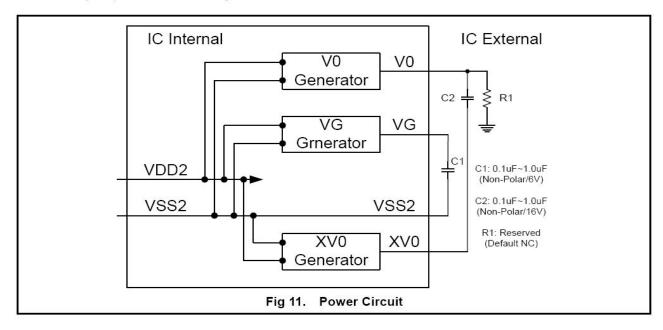

#### **Regulator Circuit**

The built-in high accuracy regulation circuit has 8 regulation ratios and each one has 64 EV-levels for voltage adjustment. Without additional external component, the output voltage can be changed by instructions such as "Regulation Ratio" and "Set EV". The detailed setting method can be found in the INSTRUCTION DESCRIPTION section.




| 1 |               |                  |               |                 |      |      |
|---|---------------|------------------|---------------|-----------------|------|------|
|   | STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | 9/27 |

#### 6. TIMING CHARACTERISTICS

6-1 For the 6800 series MPU(Default Mode)

#### System Bus Timing for 6800 Series MPU

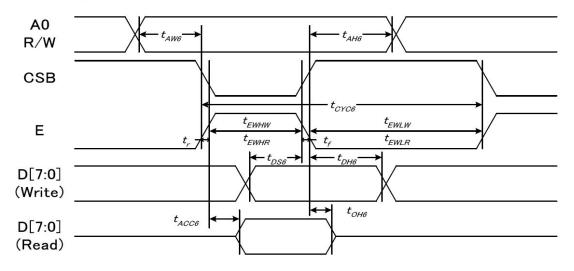

(VDD1 = 3.3V , Ta =25°C)

| Item                          | Signal | Symbol | Condition  | Min. | Max.          | Unit |
|-------------------------------|--------|--------|------------|------|---------------|------|
| Address setup time            | AO     | tAW6   |            | 0    | _             |      |
| Address hold time             | AU     | tAH6   |            | 10   | _             |      |
| System cycle time             |        | tCYC6  |            | 240  | _             |      |
| Enable L pulse width (WRITE)  |        | tEWLW  |            | 80   | 4 <u></u>     |      |
| Enable H pulse width (WRITE)  | E      | tEWHW  |            | 80   | _             |      |
| Enable L pulse width (READ)   |        | tEWLR  |            | 80   | , <del></del> | ns   |
| Enable H pulse width (READ)   |        | tEWHR  |            | 140  |               |      |
| Write data setup time         |        | tDS6   |            | 40   | _             |      |
| Write data hold time          | D[7:0] | tDH6   |            | 10   | _             |      |
| Read data access time         | [0.7]  | tACC6  | CL = 16 pF | _    | 70            |      |
| Read data output disable time |        | tOH6   | CL = 16 pF | 5    | 50            |      |

(VDD1 = 2.8V . Ta =25°C)


|                               |        |        |            | (۷00 | 71 - 2.0V , | ia -25 C) |
|-------------------------------|--------|--------|------------|------|-------------|-----------|
| Item                          | Signal | Symbol | Condition  | Min. | Max.        | Unit      |
| Address setup time            | 40     | tAW6   |            | 0    | -           |           |
| Address hold time             | A0     | tAH6   |            | 0    | _           |           |
| System cycle time             |        | tCYC6  |            | 400  | _           |           |
| Enable L pulse width (WRITE)  |        | tEWLW  |            | 220  | =           |           |
| Enable H pulse width (WRITE)  | E      | tEWHW  |            | 180  | _           |           |
| Enable L pulse width (READ)   |        | tEWLR  |            | 220  | _           | ns        |
| Enable H pulse width (READ)   |        | tEWHR  |            | 180  | :           |           |
| Write data setup time         |        | tDS6   |            | 40   |             |           |
| Write data hold time          | D(7:0) | tDH6   |            | 20   |             |           |
| Read data access time         | D[7:0] | tACC6  | CL = 16 pF | E    | 140         |           |
| Read data output disable time |        | tOH6   | CL = 16 pF | 10   | 100         |           |
|                               |        |        |            |      |             |           |



| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | 10/27 |
|---------------|------------------|---------------|-----------------|------|-------|

6-2 For 4-Line Serial Interface

# System Bus Timing for 4-Line Serial Interface

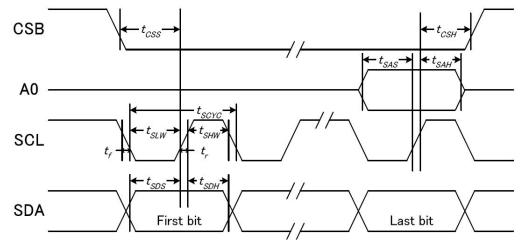

(VDD1 = 3.3V , Ta =25°C)

| Item                 | Signal | Symbol | Condition | Min. | Max.           | Unit |
|----------------------|--------|--------|-----------|------|----------------|------|
| Serial clock period  |        | tSCYC  |           | 50   | <del></del> -  |      |
| SCLK "H" pulse width | SCLK   | tSHW   |           | 25   | _              |      |
| SCLK "L" pulse width |        | tSLW   |           | 25   | <del>-</del> - |      |
| Address setup time   | 40     | tSAS   |           | 20   |                |      |
| Address hold time    | A0     | tSAH   |           | 10   | <u></u> ×      | ns   |
| Data setup time      | CDA    | tSDS   |           | 20   | -              | 7    |
| Data hold time       | SDA    | tSDH   |           | 10   | -              |      |
| CSB-SCLK time        | 000    | tCSS   |           | 20   |                |      |
| CSB-SCLK time        | CSB    | tCSH   |           | 40   |                |      |

(VDD1 = 2.8V , Ta =25°C)


|                      |        |        |           | ,    | 5 17 10 10 10 10 10 10 10 10 10 10 10 10 10 | ,    |
|----------------------|--------|--------|-----------|------|---|------|
| Item                 | Signal | Symbol | Condition | Min. | Max.  | Unit |
| Serial clock period  |        | tSCYC  |           | 100  | -   |      |
| SCLK "H" pulse width | SCLK   | tSHW   |           | 50   | _   |      |
| SCLK "L" pulse width | ]      | tSLW   |           | 50   | _   |      |
| Address setup time   | - A0   | tSAS   |           | 30   | _   |      |
| Address hold time    |        | tSAH   |           | 20   | _   | ns   |
| Data setup time      | CDA    | tSDS   |           | 30   | 2   |      |
| Data hold time       | SDA    | tSDH   |           | 20   | -   |      |
| CSB-SCLK time        | 000    | tCSS   |           | 30   | _   |      |
| CSB-SCLK time        | CSB    | tCSH   |           | 60   | _   |      |
|                      |        |        |           |      |   |      |



| 1             |                  |               |                 |      |       |
|---------------|------------------|---------------|-----------------|------|-------|
| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | 11/27 |

#### 6-3 RESET INPUT TIMING

#### **Hardware Reset Timing**

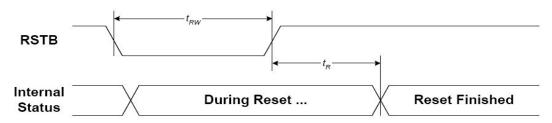

(VDD1 = 3.3V , Ta =25°C)

| Item                  | Symbol | Condition | Min.          | Max.                                    | Unit |
|-----------------------|--------|-----------|---------------|---|------|
| Reset time            | tR     |           | <del></del> / | 1.0                                     |      |
| Reset "L" pulse width | tRW    |           | 1.0           | 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - | us   |

(VDD1 = 2.8V , Ta =25°C)

| Item                  | Symbol | Condition | Min. | Max. | Unit |
|-----------------------|--------|-----------|------|------|------|
| Reset time            | tR     |           | -    | 2.0  |      |
| Reset "L" pulse width | tRW    |           | 2.0  | =    | us   |

(VDD1 = 1.8V , Ta =25°C)

| ltem                  | Symbol | Condition | Min. | Max.      | Unit |
|-----------------------|--------|-----------|------|-----------|------|
| Reset time            | tR     |           |      | 3.0       |      |
| Reset "L" pulse width | tRW    |           | 3.0  | ( <u></u> | us   |




| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | <b>12</b> /27 |
|---------------|------------------|---------------|-----------------|------|---------------|
|---------------|------------------|---------------|-----------------|------|---------------|

#### 7. POWER ON/OFF SEQUENCE

#### (1)POWER ON:

This section introduces some reference operation flows.

#### Power ON

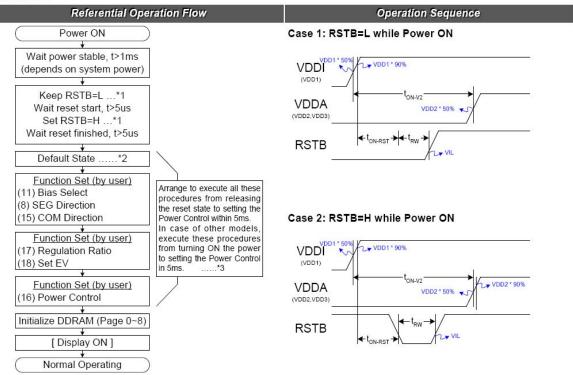

Note: The detailed description can be found in the respective sections listed below.

- 1. Please refer to the timing specification of  $t_{\text{RW}}$  and  $t_{\text{R}}$ .
- 2. Refer to Section RESET CIRCUIT.
- 3. The 5ms requirement depends on the characteristics of LCD panel and the external component of the power circuit. It is recommended to check with the real products with external component.
- 4. The detailed instruction functionality is described in Section 9. INSTRUCTION DESCRIPTION;
- 5. Power stable is defined as the time that the later power (VDDI or VDDA) reaches 90% of its rated voltage.

#### Timing Requirement:

| Item             | Symbol             | Requirement            | Note   |
|------------------|--------------------|------------------------|--|
| VDDA power delay | t <sub>ON-V2</sub> | 0 ≤ t <sub>ON-V2</sub> | Applying VDDI and VDDA in any order will not damage IC.  |
| RSTB input time  | ton-rst            | No Limitation          | If RSTB is Low, High or unstable during power ON, a successful hardware reset by RSTB is required after VDDI is stable.      RSTB=L can be input at any time after power is stable.      t <sub>RW</sub> & t <sub>R</sub> should match the timing specification of RSTB.      To prevent abnormal display, the recommended timing is: 0 ≤ t <sub>ON-RST</sub> ≤ 30 ms. |

The requirement listed here is to prevent abnormal display on LCD module.




| STANDARD PRODUCT MODULE NO. | S69508B-DB025MB | PAGE | 13/27 |
|-----------------------------|-----------------|------|-------|
|-----------------------------|-----------------|------|-------|


#### (2)POWER OFF:

#### **Power OFF Flow and Sequence**

In power save mode, LCD outputs are fixed to VSS and all analog outputs are discharged. The power can be turned OFF after ST7567 is in the power save mode. The power save mode can be triggered by the following two methods.

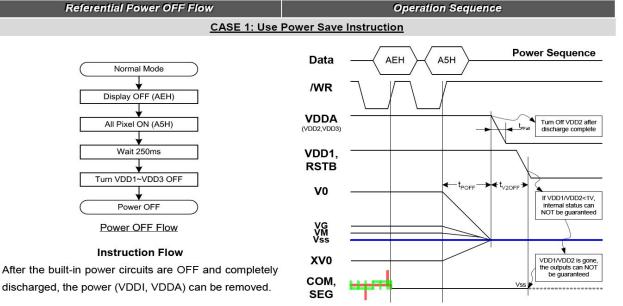

#### CASE 2: Use Hardware Reset Function

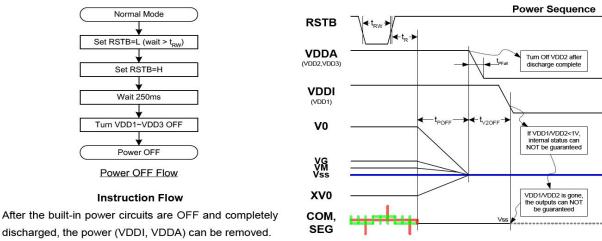

discharged, the power (VDDI, VDDA) can be removed. Note:

- tPOFF: Internal Power discharge time. => 250ms (max). 1.
- t<sub>V2OFF</sub>: Period between VDDI and VDDA OFF time. => 0 ms (min). 2.
- It is NOT recommended to turn VDDI OFF before VDDA. Without VDDI, the internal status cannot be guaranteed and internal discharge-process maybe stopped. The un-discharged power maybe flows into COM/SEG output(s) and the liquid crystal in panel maybe polarized.
- 4. IC will NOT be damaged if either VDDI or VDDA is OFF while another is ON.
- The timing is dependent on panel loading and the external capacitor(s).
- The timing in these figures is base on the condition that: LCD Panel Size = 1.4" with C1=1uF, C2=1uF. 6.
- When turning VDDA OFF, the falling time should follow the specification:  $20\text{ms} \le t_{Pfall} \le 0.2\text{sec}$



| OTANDADD. | DDODUGT | MODILLE |                  |       |       |
|-----------|---------|---------|------------------|-------|-------|
| STANDARD  |         |         | S69508B-DB025MB  | PAGE  | 14/27 |
| DOC.      | SPEC.   | NO.     | 2070002 22020112 | 1710_ | , _ , |

#### 8. RECOMMENDED INITIAL CODES

```
void Initial(void)
  CS=0;
  RES=1; DelayuS(5000);
  RES=0;
           DelayuS(5000);
  RES=1; DelayuS(5000);
                DelayuS(3); // RESET
  writec(0xe2);
  writec(0xa2);
                DelayuS(3); // 1/9 bias
  writec(0xa0); DelayuS(3); //ADC select , Normal
  writec(0xc8);
                DelayuS(3); //Common output reverse
  writec(0xf8);
                DelayuS(3); //4 booster
  writec(0x00);
                DelayuS(3);
  writec(0x24);
                DelayuS(3); // internal resistor ratio
                DelayuS(3);
  writec(0x81);
                             //electronic volume mode set
  writec(28);
                 DelayuS(3); // electronic volume
  writec(0x2c);
                DelayuS(1000); //Power Control1
  writec(0x2e);
                DelayuS(1000); //Power Control2
  writec(0x2f);
                DelayuS(1000); //Power Control3
  writec(0x40);
                               //Set Start Line
                DelayuS(3);
  writec(0xaf);
                DelayuS(3);
                                // display ON
```



| STANDARD PRODUCT MODULE NO. | S69508B-DB025MB | PAGE | 15/27 |
|-----------------------------|-----------------|------|-------|
|-----------------------------|-----------------|------|-------|

## 9.INSTRUCTION TABLE

| INSTRUCTION               | A0 | R/W   |            |    | С   | OMMAI  | ND BYT     | Έ   |     |     | DESCRIPTION  |
|---------------------------|----|-------|------------|----|-----|--------|------------|-----|-----|-----|--|
| INSTRUCTION               | AU | (RWR) | <b>D</b> 7 | D6 | D5  | D4     | <b>D</b> 3 | D2  | D1  | D0  | DESCRIPTION  |
| (1) Display ON/OFF        | 0  | 0     | 1          | 0  | 1   | 0      | 1          | 1   | 1   | D   | D=1, display ON<br>D=0, display OFF  |
| (2) Set Start Line        | 0  | 0     | 0          | 1  | S5  | S4     | S3         | S2  | S1  | SO  | Set display start line   |
| (3) Set Page Address      | 0  | 0     | 1          | 0  | 1   | 1      | Y3         | Y2  | Y1  | Y0  | Set page address   |
| (4)                       | 0  | 0     | 0          | 0  | 0   | 1      | X7         | X6  | X5  | X4  | Set column address (MSB)   |
| Set Column Address        | 0  | 0     | 0          | 0  | 0   | 0      | Х3         | X2  | X1  | X0  | Set column address (LSB)   |
| (5) Read Status           | 0  | 1     | 0          | MX | D   | RST    | 0          | 0   | 0   | 0   | Read IC Status   |
| (6) Write Data            | 1  | 0     | D7         | D6 | D5  | D4     | D3         | D2  | D1  | D0  | Write display data to RAM  |
| (7) Read Data             | 1  | 1     | D7         | D6 | D5  | D4     | D3         | D2  | D1  | D0  | Read display data from RAM   |
| (8) SEG Direction         | 0  | 0     | 1          | 0  | 1   | 0      | 0          | 0   | 0   | MX  | Set scan direction of SEG<br>MX=1, reverse direction<br>MX=0, normal direction     |
| (9) Inverse Display       | 0  | 0     | 1          | 0  | 1   | 0      | 0          | 1   | 1   | INV | INV =1, inverse display INV =0, normal display                                     |
| (10) All Pixel ON         | 0  | 0     | 1          | 0  | 1   | 0      | 0          | 1   | 0   | AP  | AP=1, set all pixel ON<br>AP=0, normal display                                     |
| (11) Bias Select          | 0  | 0     | 1          | 0  | 1   | 0      | 0          | 0   | 1   | BS  | Select bias setting<br>0=1/9; 1=1/7 (at 1/65 duty)                                 |
| (12)<br>Read-modify-Write | 0  | 0     | 1          | 1  | 1   | 0      | 0          | 0   | 0   | 0   | Column address increment:<br>Read:+0 , Write:+1                                    |
| (13) END                  | 0  | 0     | 1          | 1  | 1   | 0      | 1          | 1   | 1   | 0   | Exit Read-modify-Write mode  |
| (14) RESET                | 0  | 0     | 1          | 1  | 1   | 0      | 0          | 0   | 1   | 0   | Software reset   |
| (15) COM Direction        | 0  | 0     | 1          | 1  | 0   | 0      | MY         |     | •   | •   | Set output direction of COM<br>MY=1, reverse direction<br>MY=0, normal direction   |
| (16) Power Control        | 0  | 0     | 0          | 0  | 1   | 0      | 1          | VB  | VR  | VF  | Control built-in power circuit ON/OFF  |
| (17) Regulation Ratio     | 0  | 0     | 0          | 0  | 1   | 0      | 0          | RR2 | RR1 | RR0 | Select regulation resistor ratio   |
| /19\ Cot E\/              | 0  | 0     | 1          | 0  | 0   | 0      | 0          | 0   | 0   | 1   | Double command!! Set   |
| (18) Set EV               | 0  | 0     | 0          | 0  | EV5 | EV4    | EV3        | EV2 | EV1 | EV0 | electronic volume (EV) level   |
|                           | 0  | 0     | 1          | 1  | 1   | 1      | 1          | 0   | 0   | 0   | Double command   |
| (19) Set Booster          | 0  | 0     | 0          | 0  | 0   | 0      | 0          | 0   | 0   | BL  | Set booster level:<br>BL=0: 4X<br>BL=1: 5X   |
| (20) Power Save           | 0  | 0     |            |    | Coi | mpound | Comm       | and |     |     | Display OFF + All Pixel ON   |
| (21) NOP                  | 0  | 0     | 1          | 1  | 1   | 0      | 0          | 0   | 1   | 1   | No operation   |
| (22) Test                 | 0  | 0     | 1          | 1  | 1   | 1      | 1          | 1   | 1   | TE  | Test Command Moe TE=0: releasing test comman mode TE=1: entering test command mode |

Note: Symbol "-" means this bit can be "H" or "L".



| STANDARD PRODUCT MODULE NO. S69508B-DB025MB PAGE 16 |
|---|
|---|

# 10.ELECTRICAL CHARACTERISTICS

# 10-1 Absolute maximum ratings

| ITEM                     | CVMDOI           | STA  | NDARD ' | INIT |                      |
|--------------------------|------------------|------|---------|------|----------------------|
| ITEM                     | SYMBOL           | MIN  | TYP     | MAX  | UNIT                 |
| SUPPLY VOLTAGE FOR LOGIC | VDD              | -0.3 |         | 4    | V                    |
| LCD POWER SUPPLY VOLTAGE | V0-XV0           | -0.3 |         | 16   | V                    |
| OPERATING TEMPERATURE    | T <sub>OP</sub>  | -20  |         | 70   | $^{\circ}\mathbb{C}$ |
| STORAGE TEMPERATURE      | T <sub>STG</sub> | -30  |         | 80   | $^{\circ}\mathbb{C}$ |

#### 10-2 Electrical characteristics


| ITEM                           | CVMDOI | CONDITIONS |         | DARD V | ALUE   | UNIT |
|--------------------------------|--------|------------|---------|--------|--------|------|
| ITEM                           | SYMBOL | CONDITIONS | MIN     | TYP    | MAX    | UNII |
| SUPPLY VOLTAGE FOR<br>LOGIC    | VDD    |            | 3.2 3.3 |        | 3.4    | V    |
| SUPPLY VOLTAGE FOR<br>LCD      | V0-XV0 |            | 8.1     | 8.3    | 8.5    | V    |
| INPUT VOLTAGE "H" LEVEL        | VIH    |            | 0.7VDD  | -      | LIDD   |      |
| INPUT VOLTAGE "L" LEVEL        | VIL    |            | VSS     | -      | 0.3VDD | V    |
| OUTPUT VOLTAGE "H" LEVEL       | VOH    | Ta= 25℃    | 0.8VDD  | -      | VDD    | V    |
| OUTPUT VOLTAGE "L" LEVEL       | VOL    |            | VSS     | -      | 0.2VDD | V    |
| CURRENT CONSUMPTION (CHECKER)  | IDD    |            | -       | 0.5    | 1.0    | mA   |
| POWER CONSUMPTION<br>(CHECKER) | PC     |            | -       | 1.65   | 3.3    | mW   |



| STANDARD | PRODUCT | MODULE | CCCTOOD DDCCTTO | DAGE | 4 = 10 =      |
|----------|---------|--------|-----------------|------|---------------|
| DOC.     | SPEC.   | NO.    | S69508B-DB025MB | PAGE | <b>17</b> /27 |

#### 11. LED BACKLIGHT

11-1 LED CIRCUIT:



#### 11-2.ABSOLUTE MAXIMUN RATING

| PARAMETER             | SYMBOL | SPECIFICATIONS | UNIT       |
|-----------------------|--------|----------------|------------|
| POWER DISSIPATION     | PD     | 400            | mW         |
| FORWARD CURRENT       | Ifm    | 100            | mA         |
| PEAK FORWARD CURRENT  | Ifp    | 300            | mA         |
| REVERSE VOLTAGE       | Vr     | 5              | V          |
| OPERATION TEMPERATURE | TOPR   | -20℃~+70℃      | $^{\circ}$ |
| STORAGE TEMPERATURE   | TSTG   | -30°C∼+80°C    | °C         |

#### 11-3. ELECTRICAL CHARACTERISTICS (Ta=25°C)

| PARAMETER               | SYMBOL | LIGHT  | CONDITIONS | STANDARD VALUE |      |      | UNIT              |
|-------------------------|--------|--------|------------|----------------|------|------|-------------------|
|                         |        | SOURCE |            | MIN            | TYP  | MAX  |                   |
| FORWARD CURRENT         | If     |        | Vak=4.0V   | -              | 75   | 100  | mA                |
| REVERSE CURRENT         | IR     | White  | Vr= 5V/LED | -              | -    | 10   | uA                |
| BL BRIGHTNESS           | Lv     |        | Vak=4.0V   | 800            | 1000 | -    | cd/m <sup>2</sup> |
| CIE Color               | X      |        | Vak=4.0V   | 0.24           | 0.27 | 0.30 | -                 |
| Coordinate(without LCD) | Y      |        | vak=4.0V   | 0.24           | 0.27 | 0.30 | -                 |
| LUMINOUS UNIFORMITY     | Δ      |        | Vak=4.0V   | 75%            | -    | -    | %.                |

Note: Uniformity  $\Delta$ =(minmum LV/maximum LV)\*100%.

For operation above 25°C, The Ifm、 Ifp & PD must be derated ,the Current derating is -0.36mA/°C for Dc drive and-0.9mA/°C for pulsr drive,the power dissipation is -1.08 mW/°C, The product working current must not more than the 60 % of the Ifp according to the working temperature.


# SUCCESS宇顺


| 1             |                  |               |                 |      |       |
|---------------|------------------|---------------|-----------------|------|-------|
| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | 18/27 |


## 12. OPTICAL CHARACTERISTICS


| Itei     | n      | Symbol | Temp. | Condition | Min. | Тур. | Max. | Unit. | Note |  |   |   |     |       |   |    |   |     |  |
|----------|--------|--------|-------|-----------|------|------|------|-------|------|--|---|---|-----|-------|---|----|---|-----|--|
|          | D.     |        | -20°C |           | -    | 2100 | 2500 |       |      |  |   |   |     |       |   |    |   |     |  |
|          | Rise   | tr     | 25℃   |           | -    | 120  | 250  |       |      |  |   |   |     |       |   |    |   |     |  |
| Response | time   |        | 60℃   | θ=0°      | -    | 38   | 45   | mS    |      |  |   |   |     |       |   |    |   |     |  |
| Time     | fall   |        | -20°C | φ=0°      | -    | 4400 | 5300 | IIIS  | -    |  |   |   |     |       |   |    |   |     |  |
|          | time   |        | tf    | 25℃       |      | -    | 200  | 240   |      |  |   |   |     |       |   |    |   |     |  |
|          | tillic |        | 60°C  |           | -    | 65   | 80   |       |      |  |   |   |     |       |   |    |   |     |  |
|          |        |        |       | Ф=0°      | -    | 30   | -    |       |      |  |   |   |     |       |   |    |   |     |  |
| Viewing  | Angle  |        |       | 0         | θ    | 0    |      | Angle | 0    |  | 0 | 0 | 25℃ | Ф=90° | - | 30 | - | doa |  |
|          |        | 0      | Cr≥2  | Ф=180°    | -    | 30   | -    | deg.  | -    |  |   |   |     |       |   |    |   |     |  |
|          |        |        |       | Ф=270°    | -    | 40   | -    |       |      |  |   |   |     |       |   |    |   |     |  |
| Contrast | Ratio  | Cr     | 25℃   | θ=φ=0°    | 3    | 5    | -    | -     | -    |  |   |   |     |       |   |    |   |     |  |

## (1) DEFINITION OF VIEWING ANGLE



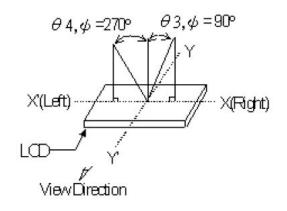

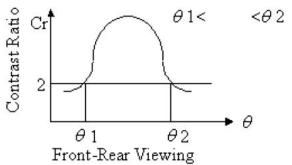


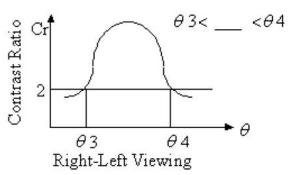




| STANDARD<br>DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | 19/27 |
|------------------|------------------|---------------|-----------------|------|-------|


## (2) DEFINITION OF CONTRAST

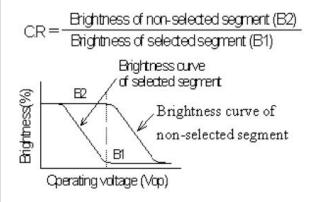

# (3) DEFINITION OF RESPONSE

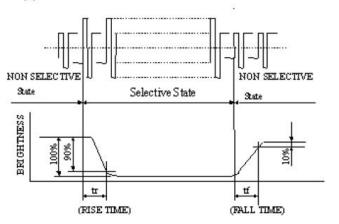

(4) MEASURING INSTRUMENTS FOR ELECTRO-OPTICAL CHARACTERISTICS

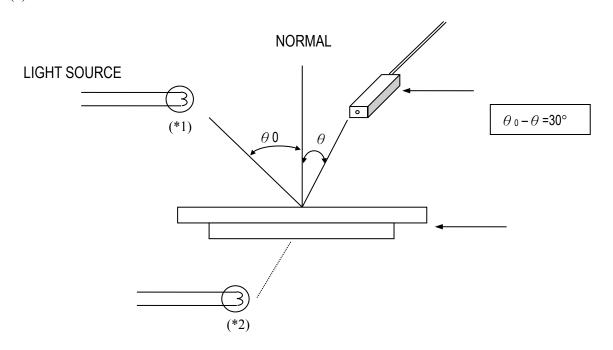

- \*1.Light source position for measuring the reflective type of LCD panel
- \*2.Light source position for measuring the transflective / transmissive types of LCD panel



| STANDAR<br>DOC. | PRODUCT SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | <b>20</b> /27 |
|-----------------|---------------|---------------|-----------------|------|---------------|

## 13. ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

| ITEM                   | SYMBOL | CONDITIONS   | CRITERION                   |
|------------------------|--------|--------------|-----------------------------|
| OPERATING TEMPERATURE  | TOPR   | -20℃ ~+70℃   | NO DEFECT IN DISPLAYING AND |
| OPERATING TEMPERATURE  | TOPK   | -20 C ∼+70 C | OPERATIONAL FUNCTION        |
| CTOD A CE TEMBER ATURE | ТОТС   | -30℃ ~+80℃   | NO DEFECT IN DISPLAYING AND |
| STORAGE TEMPERATURE    | TSTG   | -30 C ~+80 C | OPERATIONAL FUNCTION        |
| HUMIDITY               | _      | See Note     | WITHOUT CONDENSATION        |

Note: Test condition:

- 1) Temperature and humidity: if no specification, temperature set at  $25+/-2^{\circ}C$ , and humidity set at 60+/-5% RH.
  - 2)Operating state:all the tests to which the samples subject should be in operating condition.

#### 14. RELIABILITY TEST

| ITEM            | CONDITIONS   | CRITERION                               |
|-----------------|--|---|
| Operating       | HIGH TEMPERTURE 70℃ 120HRS   | No defect in displaying and operational |
| Temperature     | LOW TEMPERTURE -20°C 120HRS  | function                                |
| Storage         | HIGH TEMPERTURE +80℃ 120HRS  | No defect in displaying and operational |
| Tempereature    | LOW TEMPERTURE -30°C 120HRS  | function                                |
| High Humidity & | 40℃* 90%RH 120HRS  | No defect in displaying and operational |
| high Temp       | 40 C 90/6KH 120HKS   | function                                |
|                 | • Operating Time: 30 minutes exposure for  |   |
| Vibration       | each direction (X,Y,Z)   | No defect in displaying and operational |
| Violation       | • Sweep Frequency: 10~55Hz (1 min)   | function                                |
|                 | Amplitude: 1.5mm   |   |
| Thermal Shock   | $-20^{\circ}\text{C}(30\text{mins}) \leftarrow \rightarrow +70^{\circ}\text{C}(30\text{mins}) 50 \text{ cycles}$ | No defect in displaying and operational |
| Thermal Shock   | -20 C(30mms) X 7 + 70 C(30mms) 30 Cycles   | function                                |

# SUCCESS字顺

| 1             | I                | I .           |                 | 1    | <u> </u>      |
|---------------|------------------|---------------|-----------------|------|---------------|
| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | <b>21</b> /27 |


#### 15. THE STANDARD OF INSPECTION

#### 15-1 SAMPLING PLAN

Unless there is other agreement, sampling plan for incoming inspection should follow GB2828-2003.

- 15-1-1 Lot size: Quantity per shipment as one lot (different model as different lot .)
- 15-1-2 Sampling type: Normal inspection, single sampling.
  - 15-1-3 Sampling level: Level II.
  - 15-1-4 Acceptable Quality Level

Major defect: AQL=0.40 Minor defect: AQL=0.65 Total defect : AQL=0.65

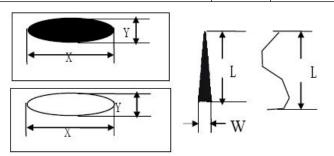

#### 15-2 PANEL INSPECTION CONDITION

- 15-2-1 Environment:Room Temperature: 25 ± 5 °C. Humidity: 55 ± 5% RH.Illumination:800~1200Lux.
- 15-2-2 Inspection Distance:  $25\pm 5$  cm from the inspector to the module.
- 15-2-3 Inspection Angle: The vision of inspector should be perpendicular to the surface of the module.

#### 16-3 MODULE INSPECTION STANDARDS

#### 16-3-1 Defect definition

MAJOR:display or functional defects, serious deviation from the specifications, customers can not work properly; Severe skin defects, serious deviation from the specifications, the client does not work properly.

MINOR: slightly deviate from the specifications, does not affect the product function, but the appearance of an impact on product

Note: The following standard if no entities are specified, with mm meter.

#### 15-3-2 Product area and size code definition

A area: said display active area(characters display)

B area: says visual area (except A area)

C area: the unvisual areas.

T: it says the thickness of the single glass

L: said glass pin lengths

K: said product length

X :said glass long side direction or glass edge direction along the length of the gap


Y :said glass short side direction or gap with glass edge along the vertical length


Z: the thickness of crack or gap

#### 15-3-2 Point, line definition

point:  $\Phi = (X + Y) / 2$ 

The length of the X says point length; Y says point width Line:L says the length of the line; W says line width

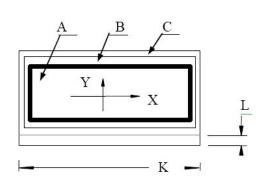





| TANDA<br>DOC |                        | PRODU<br>SPEC       |  | S69508B-DB  | 025MB                                | PAGE             | 22/2       |
|--------------|------------------------|---------------------|--|---|--------------------------------------|------------------|------------|
| DOC          | nspecti<br>Item<br>Dim | SPEC                | C. NO.   | appearance(power off)  the specification  | Y Not over A area  Y Not over A area | Z                | AQL<br>1.0 |
|              |                        |                     | 4. Substrate prote   | aberance and internal crack $ \begin{array}{c c} X \\ \geqslant K/8 \end{array} $ erack: $\leq L/5$ | Y<br> ≥ L/3                          |                  |            |
| 3            |                        | ck dot \<br>ite dot | Y  | A/E   | eptable of defects<br>Area<br>check  | C Area  No check | 2.50       |
|              |                        |                     | X: long diameter<br>Y: shot diameter<br>D: average of dian | neter D=(X+Y)/2   |                                      |                  |            |



| TAND.<br>DOC |               | PRODU<br>SPEC     |                      | MODULE<br>NO.                          |   | S69508B-  | DB025M                                  | В           | PAGE                | 23/27 |
|--------------|---------------|-------------------|----------------------|--|---|---|---|-------------|---------------------|-------|
|              |               |                   | <b>→</b>             | L<br>W                                 | Length accept L≤3   | hidth  W≤0.02  W≤0.05                             | Accep<br>A/B A<br>No ch                 | eck         | efect Area To check |       |
| 4            | Line          | defect            |                      | L<br>ength W: W                        |   | W≤0.05<br>W>0.05                                  |   | and type    |                     | 2.50  |
| 5            | Polar<br>Bubb |                   | Dete                 | x                                      | D $ \begin{array}{c} D \leqslant 0.2 \\ 0.2 \leqslant D \\ 0.5 \leqslant D \\ D > 1.0 \end{array} $ | ≤1.0  | Acce table of det A/B Area No check 3 2 | fect C A    |                     | 2.50  |
| 6            | Exter of pa   | rnal print<br>nel |                      |  | hole: same  | e as segment to<br>2 standard wid                 | ransfinguer                             | ıble        |                     | 2.50  |
| 7            | Silice        | on glue           | The a                | area of painting                       | ng silicon g  | lue must cove                                     | r the ITO cire                          | cuit.       |                     | 2.50  |
| 8            | Defe<br>PCB   | ct of             | are u                | nreceivable f                          | or PCB.   | resking off circ                                  |   |             |                     | 2.50  |
| 9            | SMT           | organ             | Tryir<br>Dam<br>comp | ng to keep dot<br>age break<br>oonent. | of soldering wrong as   | width of comp<br>ng tin orbicula<br>sembly and ur | r<br>nseal are unre                     | eceivable f | or                  | 2.50  |
| 10           | Steel         | Frame             | If the               |  | which can   | ceivable for fr<br>not lead to ca<br>3mm          |   | painting, v | we allow            | 2.50  |
| 15-3-4       | Inspect       | ion items a       | and spe              | ecification for                        | display de  | fect(power on                                     | )                                       |             |                     |       |
| 1            | Elect<br>Defe |                   |                      |  | nent missin   | g Not allow Not allow                             |   |             |                     | 1.0   |



| STAND/<br>DOC |                    | RODUC<br>SPEC. |  |         |                              | S69508B-DI   | B025MB   | PAGE           | <b>24</b> /27 |
|---------------|--------------------|----------------|--|---------|------------------------------|--|--|----------------|---------------|
| 2             | Pin hole           |                | 1. Pin hole                                  |         | ¥<br>ĀB<br>Ā                 | width $W < 0.4$ $W \ge 0.4$ * D=(A+B)/2  | Acceptable of $D \le 0.2 \& D \le 0.25 \& D \le 0.25 \& D \le 0.1 \ acceptable$        | 1/2W<br>≤1/3W  | 2.50          |
| 3             | Display<br>pattern |                | W: Design d                                  | imensio | on C                         | Width W<0.4 W≥0.4  D: discrepant directions  | Acceptable of $C$ , $D$ , $G \le 1/2$ $C$ , $D$ , $G \le 0$ .  The mension $G =  E-F $ | ′2W            | 1.0           |
| 4             | Black/w<br>dot     |                | X: long diam<br>Y: shot diam<br>D: average d | eter    | r D                          | D $ \begin{array}{c} D < 0.1 \\ 0.1 \le D < 0.2 \\ 0.2 \le D \le 0.25 \\ D > 0.25 \end{array} $ $= (X+Y)/2$                      | No check   | Area           | 2.50          |
| 5             | Line def           |                | L W  |         | Length<br>不计<br>L≤3<br>L≤2.5 | Width $ \begin{array}{c} W \leqslant 0.02 \\ W \leqslant 0.03 \\ 0.03 < W \leqslant 0.0 \\ W > 0.05 \end{array} $ ength W: width | No check   | Area  Jo check | 2.50          |

#### 16. USING LCD MODULES

#### 16-1 LIQUID CRYSTAL DISPLAY MODULES

- LCD is composed of glass and polarizer. Pay attention to the following items when handling.
- (1) Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.



| 1             |                  |               | 1               |      |               |
|---------------|------------------|---------------|-----------------|------|---------------|
| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | <b>25</b> /27 |

- (2) Do not touch, push or rub the exposed polarizer with anything harder than an HB pencil lead (glass, tweezers, etc.).
  - (3) N-hexane is recommended for cleaning the adhesives used to attach front/rear polarizers and reflectors made of organic substances which will be damaged by chemicals such as acetone, toluene, ethanol and isopropylalcohol.
  - (4) If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, wipe gently with absorbent cotton or other soft material like chamois soaked in Isopropyl alcohol or Ethyl alcohol. Do not scrub hard to avoid damaging the display surface.
  - (5) Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading.
  - (6) Avoid contacting oil and fats.
  - (7) Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizers.

    After products are tested at low temperature they must be warmed up in a container before coming is contacting with room temperature air.
  - (8) Do not put or attach anything on the display area to avoid leaving marks on.
  - (9) Do not touch the display with bare hands. This will stain the display area and degradate insulation between terminals (some cosmetics are determinated to the polarizers).
  - (10) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
  - (11) As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring.

#### 16-2 PRECAUTION FOR HANDING LCD MODULES

Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.

- (1) Do not alter, modify or change the the shape of the tab on the metal frame.
- (2) Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
- (3) Do not damage or modify the pattern writing on the printed circuit board.
- (4) Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
- (5) Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- (6) Do not drop, bend or twist LCM. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- (7) In order to avoid the cracking of the FPC, you should to pay attention to the area of FPC where the FPC was bent .the edge of coverlay; the area of surface of Ni-Au plating, the area of soldering land, the area of through hole.

#### 16-3 ELECTRO-STATIC DISCHARGE CONTROL

Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC.




| STANDARD PRODUCT MODULE NO. | S69508B-DB025MB | PAGE | <b>26</b> /27 |
|-----------------------------|-----------------|------|---------------|
|-----------------------------|-----------------|------|---------------|

- (1) Make certain that you are grounded when handing LCM. To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules. Exposed area of the printed circuit board. Terminal electrode sections.
- (2) Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential.
- (3) When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.
- (4) When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
- (5) As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.
  - (6) To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended.

#### 16-4 PRECAUTIONS FOR OPERATION

- (1) Viewing angle varies with the change of liquid crystal driving voltage (VO). Adjust VO to show the best contrast.
  - (2) Driving the LCD in the voltage above the limit shortens its life.
  - (3) If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.
  - (4) Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
  - (5) If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.
  - (6) Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40°C, 50% RH.
  - (7) When turning the power on, input each signal after the positive/negative voltage becomes stable.

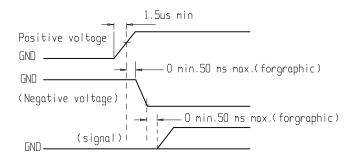



| STANDARD DOC. | PRODUCT<br>SPEC. | MODULE<br>NO. | S69508B-DB025MB | PAGE | <b>27</b> /27 |
|---------------|------------------|---------------|-----------------|------|---------------|
|---------------|------------------|---------------|-----------------|------|---------------|

#### 16-5 STORAGE

When storing LCDs as spares for some years, the following precaution are necessary.

- (1) Store them in a sealed polyethylene bag. If properly sealed, there is no need for dessicant.
- (2) Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.
  - 3) The polarizer surface should not come in contact with any other objects. (We advise you to store them in the container in which they were shipped.)
  - (4) Environmental conditions:
    - Do not leave them for more than 180hrs. at 70°C.
    - Should not be left for more than 48hrs. at -20°C.

#### **16-6 SAFETY**

- (1) It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.
- (2) If any liquid leakes out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

#### 14-7 LIMITED WARRANTY

Unless agreed between SUCCESS and customer, SUCCESS will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with SUCCESS LCD acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defects must be returned to SUCCESS within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of SUCCESS limited to repair and/or replacement on the terms set forth above. SUCCESS will not be responsible for any subsequent or consequential events.

#### 16-8 RETURN LCM UNDER WARRANTY

No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are :

- Broken LCD glass.
- Circuit modified in any way, including addition of components.

Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB's eyelet, conductors and terminals.