



main viewing direction

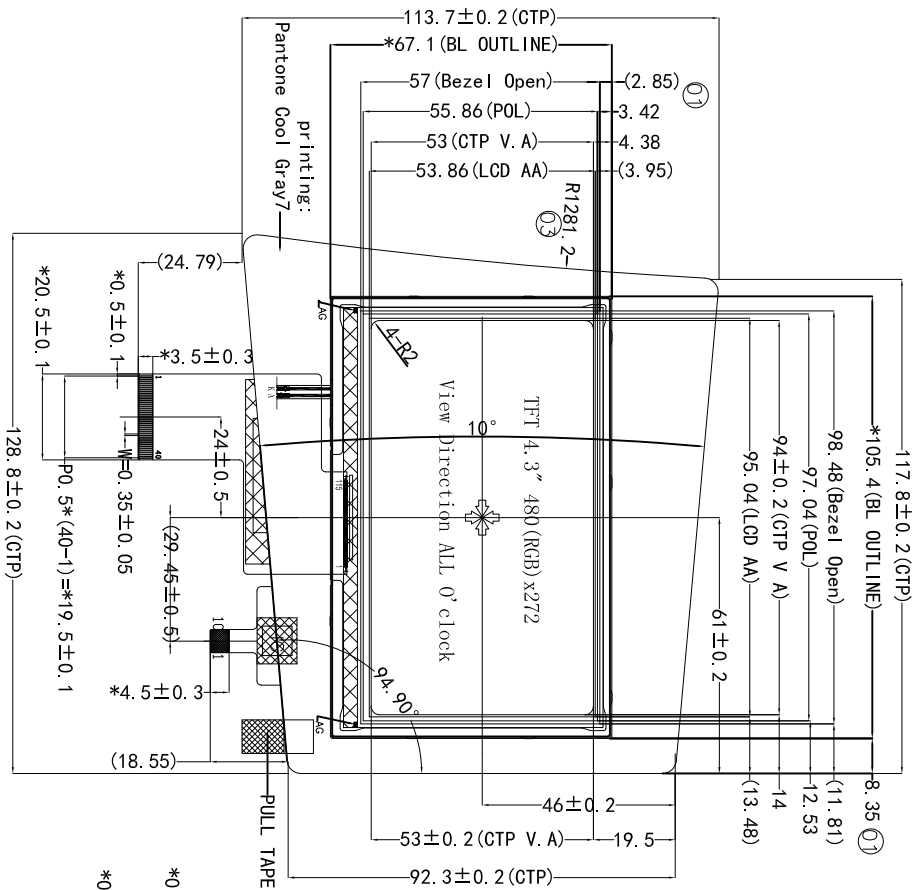

REV.	SYMBOL	DESCRIPTION	NAME	DATE
00		First issue	Zhangmoyan	2019-04-16
01	01	Change BL dimension and LED	Zhangmoyan	2019-04-18
02	02	Change CTP dimension	Zhangmoyan	2019-04-30
03	03	Change CTP dimension	Zhangmoyan	2019-05-05

No	PIN NAME
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	R8
14	R9
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

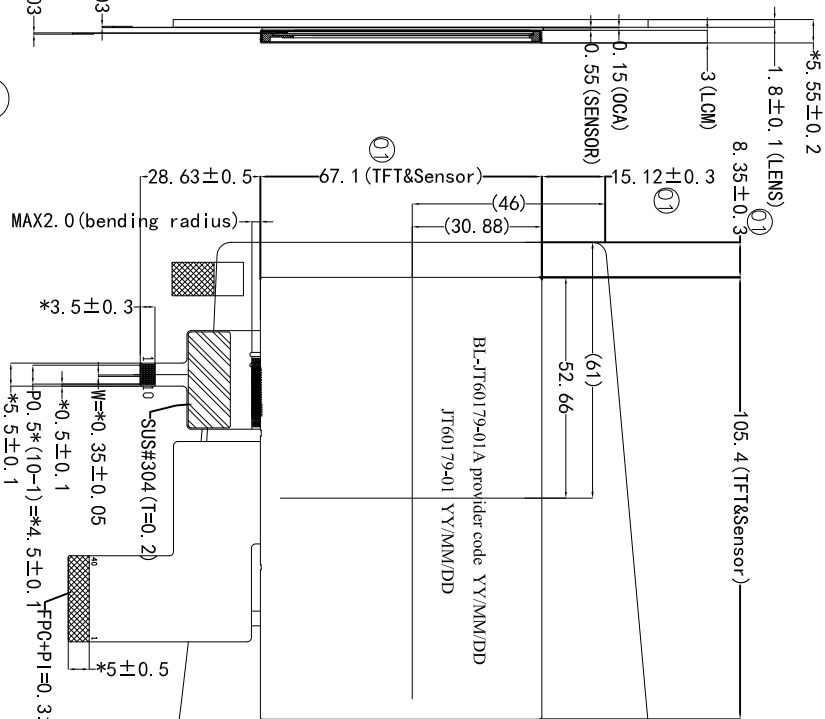

LED CIRCUIT DIAGRAM:

IF=40mA, VF=14.5-17.0V

请客户确认图纸!

确认签名: _____

郴州市晶讯光电有限公司
CHENZHOU JENSON DISPLAY CO.,LTD

Tel:0735-5550618 Fax:0735-5550628 Http://www.jenson-led.com

ITEM	PARAMETERS	ITEM	PARAMETERS
DISPLAY TYPE	o-SI TFT LCD, Normally Black	VIEWING DIRECTION	ALL 0° CLOCK
POLARIZER TYPE	TRANSMISSIVE	OPERATING TEMPERATURE	-20°C TO +70°C
LCM LUMINANCE	680cd/m ² (MIN), 760cd/m ² (TYP)	STORAGE TEMPERATURE	-30°C TO +80°C
LCM Color Coordinate	X=0.29±0.03, Y=0.31±0.03	IC	SC7283+GT911
BACKLIGHT	WHITE, 10LED 14.5-17V 40mA	LOGIC VOLTAGE(VDD)	3.3V
ROHS COMPLIANT		CONNECTING METHOD	COG+FPC+BI+CTP
DIMENSIONS WITH MARK*	*ARE IMPORTANT, WITH MARK“()”ARE REFERENCED, WITH MARK“◇”ARE SPECIAL	MODULE NO.	JT60179-01
CHARACTERISTICS WITH MARK*●	*ARE IMPROTANT CHARACTERISTICS.	CUSTOMER NO.	

THIS DRAWING IS PROPERTY OF JENSON DISPLAY CO. LIMITED. IT CANNOT BE REPRODUCED WITHOUT PERMISSION