

# PRODUCT SPECIFICATION

*CS0802C-D-BSXTSWN-101*

*VI.0*

March 3, 2008

 Eastertronic LCD Group

## REVISION RECORD

REV	DESCRIPTION	DATE
V1.0	Frist Issue	March 3, 2008




## CONTENTS

SECTIONS	DESCRIPTION	PAGE NO.
1.	Type Number and Description .....	4
2.	LCD Module Numbering System .....	5
3.	Mechanical Specifications .....	6
4.	Electrical Block Diagram .....	7
	4.1 Pins Definition	
	4.2 Electrical Block Diagram	
	4.3 Display Character Address Code	
5.	Absolute Maximum Ratings .....	8
	5.1 Electrical Maximum Ratings	
	5.2 Environmental Conditions	
6.	Electrical Specifications .....	9
	6.1 Electrical Characteristics	
	6.2 Timing Specification	
7.	Power Supply for LCD Module .....	10
8.	Electro-Optical Characteristic .....	11
9.	Instruction Table .....	13
10.	Initialization by Inseruction .....	14
11.	Software examples .....	15
12.	Standard character pattern .....	17
13.	Precaution for Using LCM .....	18
14.	Declaration of conformity regarding the limitation of dangerous substances .....	19

**1. TYPE NUMBER AND DESCRIPTION**


Type Number	:	CS0802C-D-BSXTSWN-101
Description	:	8 Characters X 2 lines
LCD Panel	:	Blue STN, Negative, Transmissive
Viewing angle	:	6H
Duty and Bias	:	1/16 duty, 1/5 bias
Logic Voltage	:	5.0V
Operating Temperature	:	-20°C–70°C
Storage Temperature	:	-30°C–80°C
Controller	:	ST7066U-OA or equivalent
IC package	:	Bonding
BackLight Type	:	Side, White LED

## 2. LCD MODULE NUMBERING SYSTEM

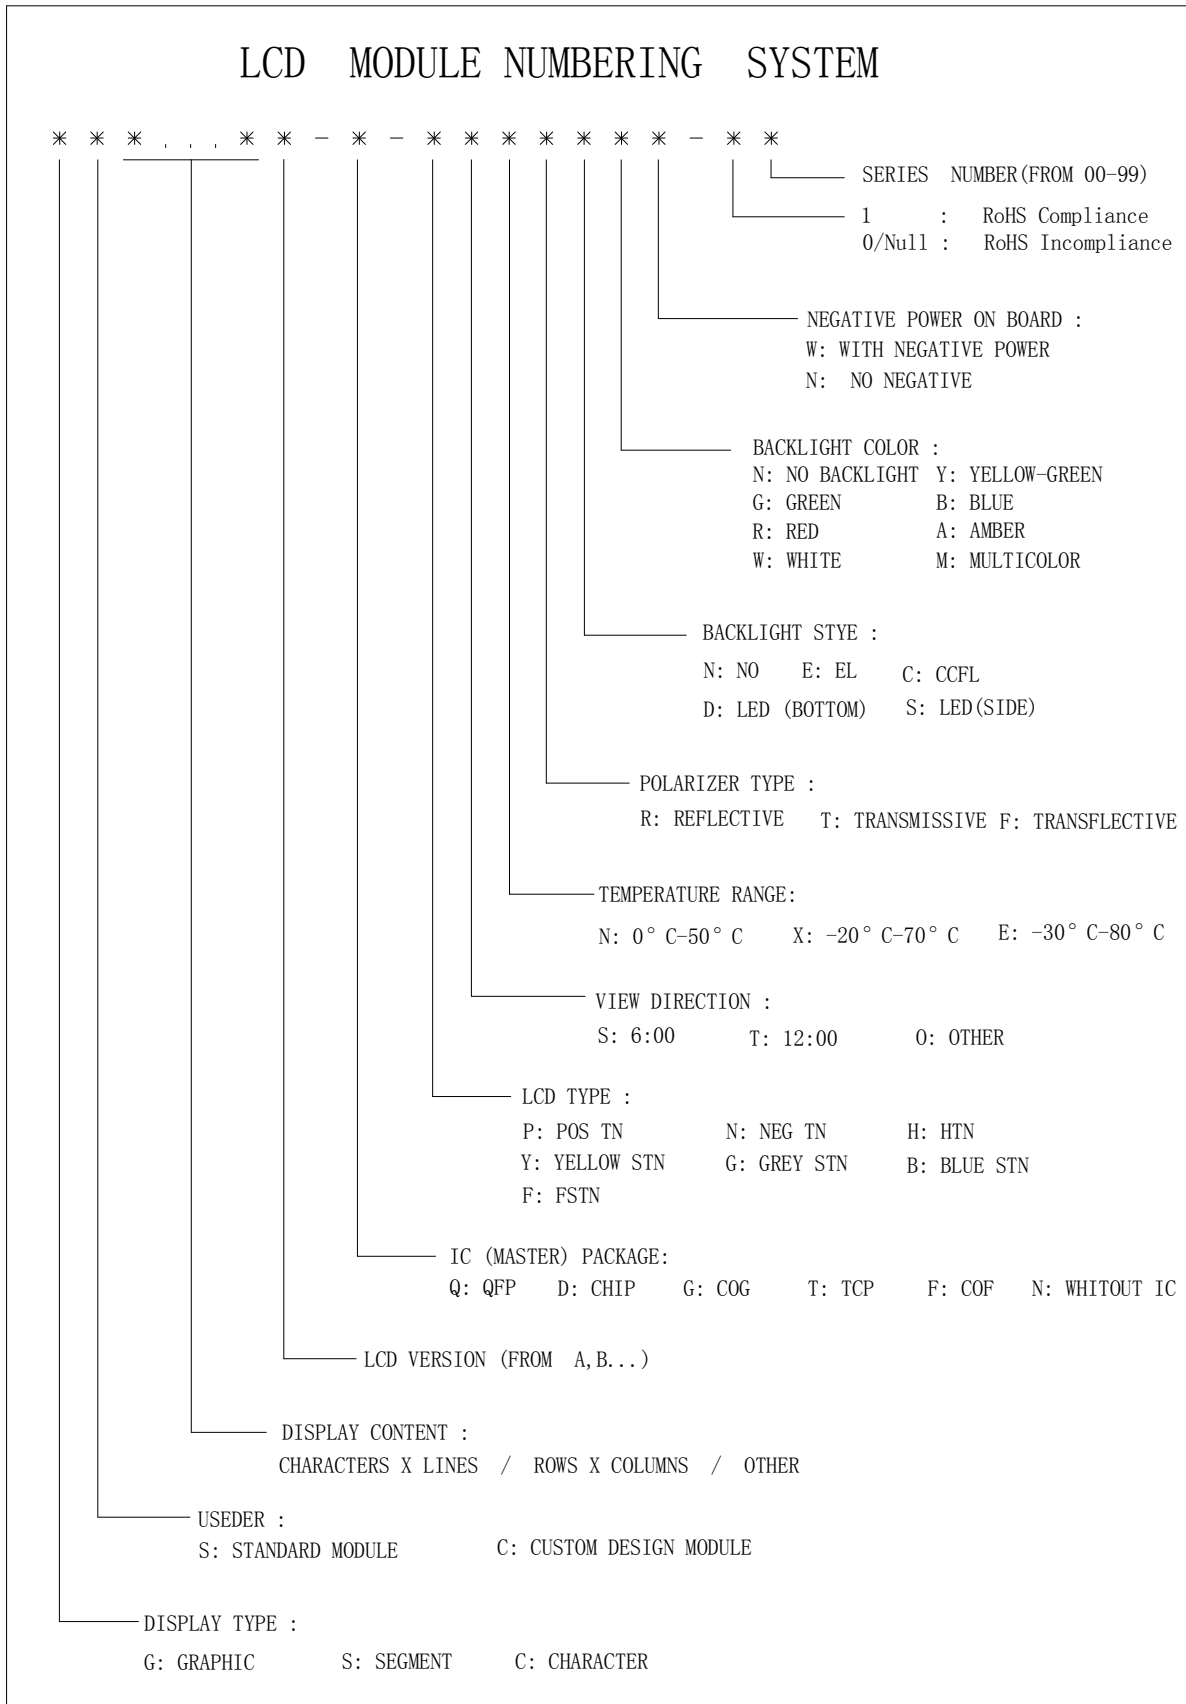

3. MECHANICAL SPECIFICATIONS:

ITEM	STANDARD VALUE	UNIT
NUMBER OF CHARACTERS	8 CHARACTERS X 2 LINES	
CHARACTER FORMAT	5 X 7 DOTS with CURSOR	
MODULE DIMENSION	40.0(W) X 35.5(H) X 12.5(T)	mm
EFFECTTVE DISPLAY AREA	30.0(W) X 14.0(H)	mm
CHARACTER SIZE	2.70(W) X 4.35(H)	mm
CHARACTER PITCH	3.10(W) X 4.75(H)	mm
DOT SIZE	0.50(W) X 0.50(H)	mm
DOT PITCH	0.55(W) X 0.55(H)	mm
APPROX WEIGHT	50	g
LCD TYPE	Blue STN, Negative, Transmissive	
DUTY AND BIAS	1/16 DUTY; 1/5 BIAS	
VIEWING DIRECTION	6:00	
BACK LIGHT	Side, White LED	

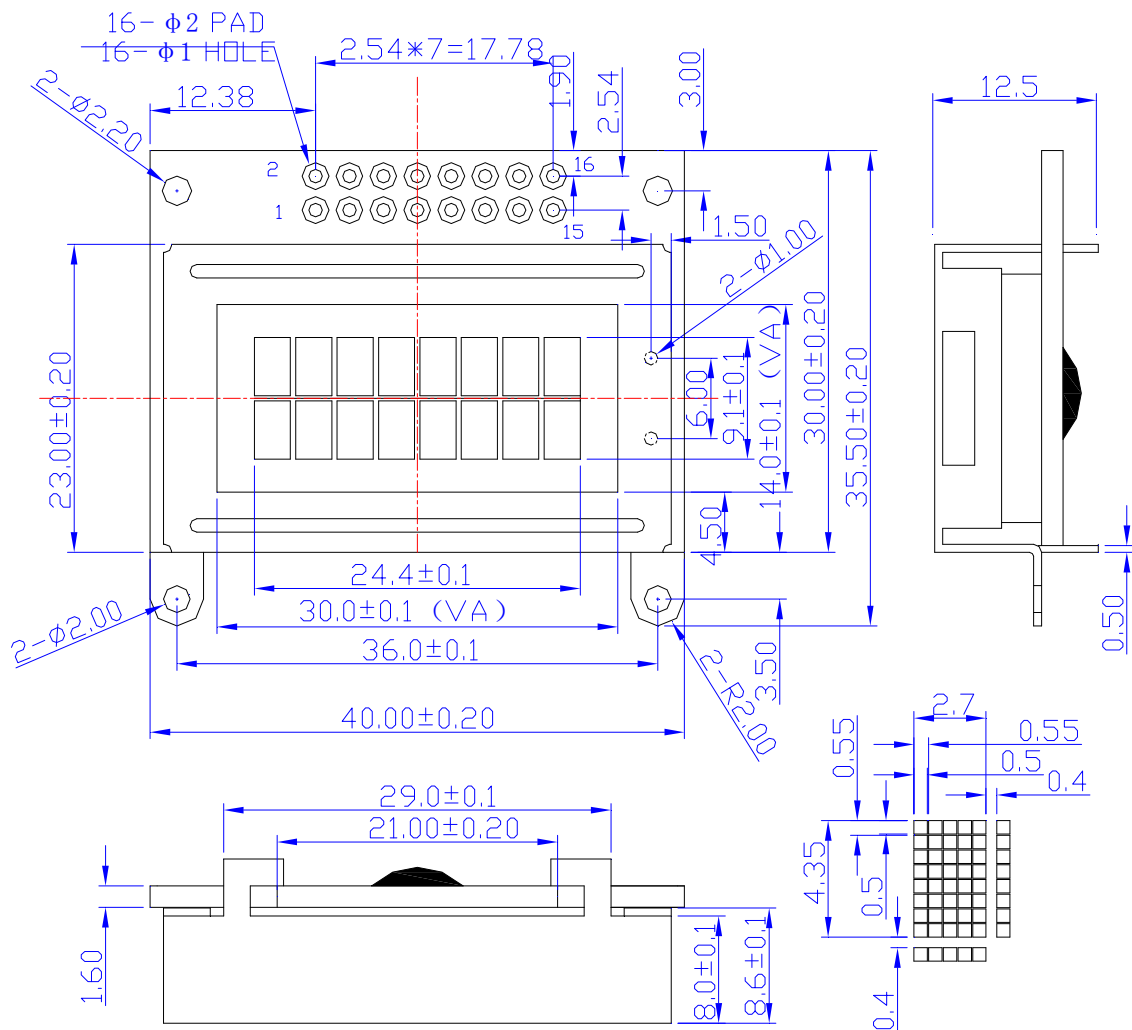


## 4. ELECTRICAL BLOCK DIAGRAM

### 4.1 PINS DEFINITION

PIN	SYMBOL	FUNCTION
1	Vss	Power Supply(GND)
2	Vdd	Power Supply(+5V)
3	Vo	Contrast Adjust
4	RS	Instruction/Data Register Select
5	R/W	Data Bus Line
6	E	Enable Signal
7-14	DB0-DB7	Data Bus Line
15	A	Power Supply For LED Backlight(+)
16	K	Power Supply For LED Backlight(-)

### 4.2 ELECTRICAL BLOCK DIAGRAM

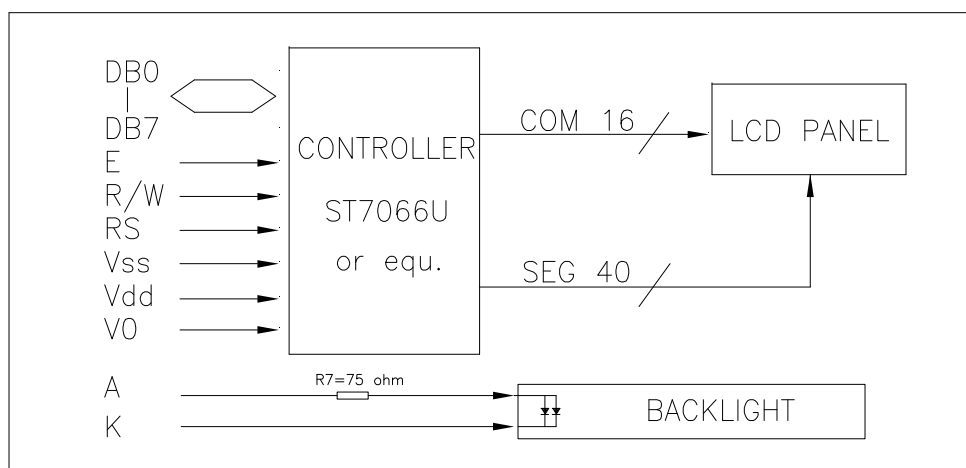

### 4.3 DISPLAY CHARACTER ADDRESS CODE

DISPLAY POSITION		1	2	3	4	5	6	7	8
DDRAM ADDRESS	LINE1	00	01	02	03	04	05	06	07
	LINE2	40	41	42	43	44	45	46	47





## 6. ELECTRICAL SPECIFICATIONS

### 6.1 Electrical Characteristics at Ta=25 deg C, Vdd = 5V + / - 5%

ITEM	SYMBOL	CONDITION	MIN	TY P	MAX	UNIT
Supply Voltage (logic)	Vdd-Vss	-	4.5	5.0	5.5	V
Supply Voltage (LCD)	Vdd-V0	Vdd = 5V	4.6	4.8	5.0	V
Input signal voltage (for E, DB0-7,R/W,RS)	V-ih	“H” level	0.7 Vdd	-	Vdd	V
	V-il	“L” level	0	-	0.6	V
Supply Current (logic)	Icc	-	0.9	1	1.2	mA
Supply Current (LCD)	Io	-	0.15	0.2 2	0.27	mA
Supply Voltage (LED)	V-bl	-	2.9	3.1	3.3	V
Supply Current(LED)	I-bl	-	-	30	40	mA

### 6.2 Timing Specifications at Ta = 25 deg C, Vdd = 5V+/-10%, Vss =0V

#### 6.2.1 Write mode


ITEM	SYMBOL	MIN	MAX	UNIT
E cycle time	tc	1200	-	ns
E rise time	tR	-	25	ns
E fall time	tF	-	25	ns
E-pulse width (H, L)	tw	140	-	ns
R/W and RS set-up time	tsul	0	-	ns
R/W and RS hold time	tH1	10	-	ns
Data set-up time	tsu2	40	-	ns
Data hold time	tH2	10	-	ns

#### 6.2.2 Read mode


ITEM	SYMBOL	MIN	MAX	UNIT
E cycle time	tc	1200	-	ns
E rise time	tR	-	25	ns
E fall time	tF	-	25	ns
E-pulse width (H, L)	tw	140	-	ns
R/W and RS set-up time	tsu	0	-	ns
R/W and RS hold time	tH	10	-	ns
Data output delay	tD	-	120	ns
Data hold time	tDH	20	-	ns

### 6.2.3 Timing Diagram


WRITE MODE TIMING DIAGRAM

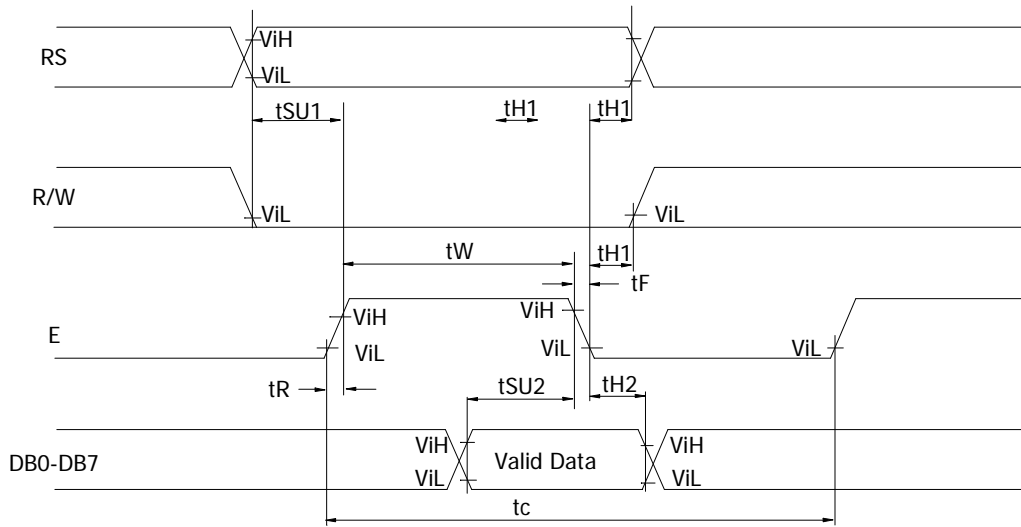

READ MODE TIMING DIAGRAM

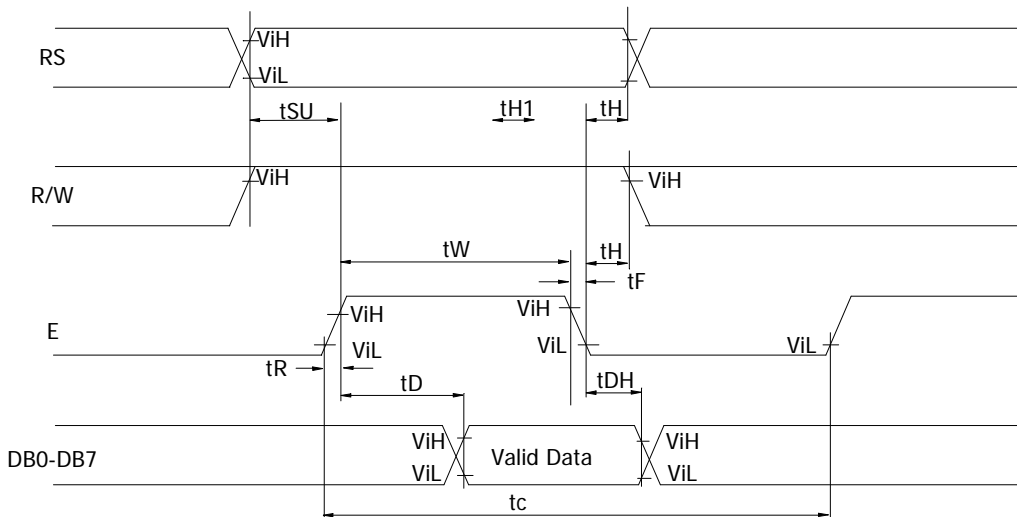

## 7. POWER SUPPLY FOR LCD MODULE

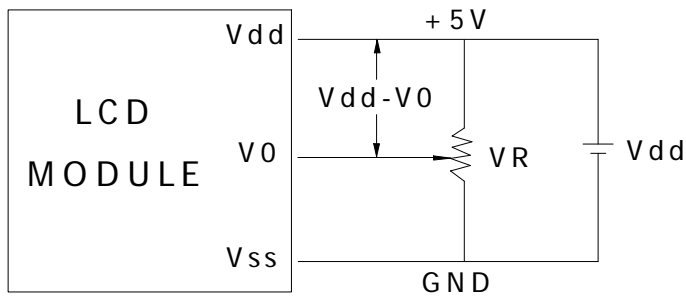

Vdd-V0: LCD Driving Voltage  
VR: 10K - 20K

8. ELECTRO-OPTICAL CHARACTERISTIC


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REF.
Contrast	CR	25°C	--	10	--		Note1
Rise Time	tr	25°C	--	160	240	ms	Note2
Fall Time	tf	25°C	--	100	150	ms	note 2
Viewing Angle	θ1-θ2	25°C	--	--	60	DEG	Note 3
	Ø1, Ø2		-40	--	40		
Frame Frequency	Ff	25°C	--	64	--	Hz	note 2

**Note(1): Contrast ratio is defined under the following condition:**

$$CR = \frac{\text{brightness of selected condition}}{\text{brightness of non-selected condition}}$$



- (a). Temperature-----25C
- (b). Frame Frequency-----64Hz
- (c). Viewing angle-----θ=0, Ø=0
- (d). Operating Voltage---4.8V

**Note(2): definition of response time:**

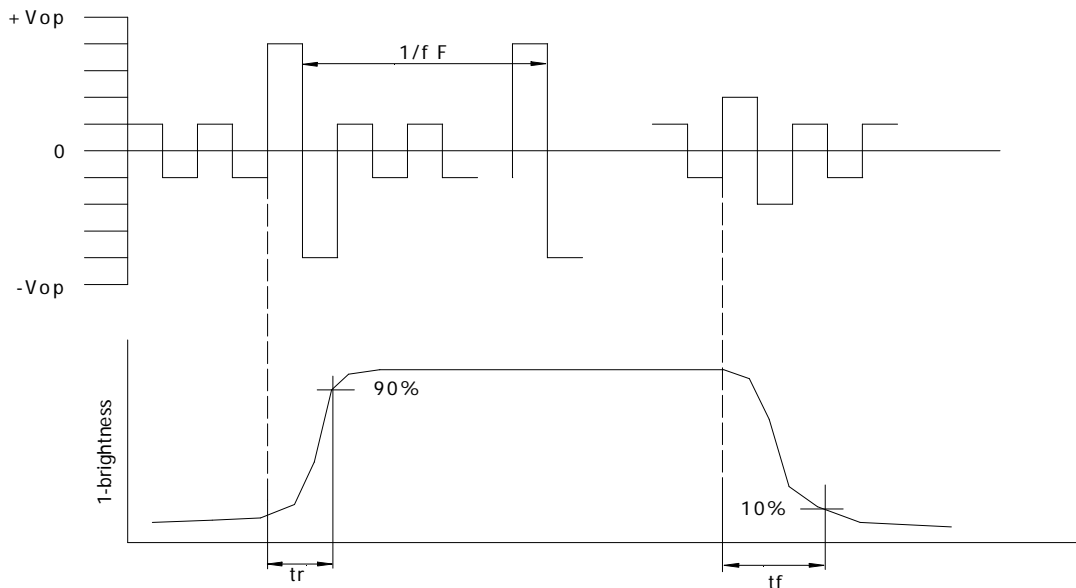

**Condition:**

- (a). Temperature-----25C
- (b). Frame Frequency-----64Hz
- (c). Viewing angle----- $\theta=0$ ,  $\theta=0$
- (d). Operating Voltage---4.8V

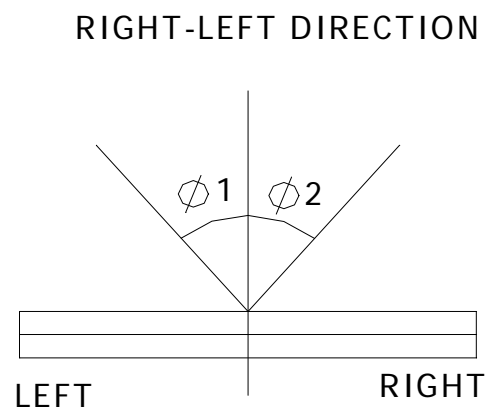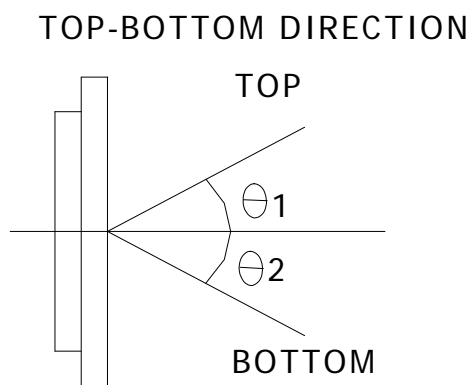**Note(3): definition of view angle:**

## 9. INSTRUCTION TABLE

Function	R	R	D	D	D	D	D	D	D	Description	Execu Time* (Max)					
	S	W	B	B	B	B	B	B	B							
			7	6	5	4	3	2	1	0						
Clear Display	0	0	0	0	0	0	0	0	0	1	Clears entire display and returns the cursor to home position (address 0)	1.64mS				
Return Home	0	0	0	0	0	0	0	0	0	1	X	Return the cursor to the home position. DD RAM contents remain unchanged. Set DD RAM address to zero.	1.64mS			
Entry mode set	0	0	0	0	0	0	0	1	1	S	/	D	Set cursor moving direction and enable the shift of the display. These operations are performed during data write/read of DD RAM/CG RAM. 1/D=1: increment; 1/D=0: decrement; S=1: whole display shift when data is written.	40 μ S		
Display ON/OFF control	0	0	0	0	0	0	1	D	C	B			Set display (D), cursor(C) and blinking of cursor(B) ON/OFF. D=1: display ON; D=0: display OFF. C=1: Cursor ON; C=0: cursor OFF. B=1: Blink ON; B=0, Blink OFF.	40 μ S		
Cursor or Display shift	0	0	0	0	0	1	S	R	X	X	/	/	C	L	Move the cursor and shift the display without changing DDRAM contents. S/C=1: Display Shift; S/C=0:Cursor move. R/L=1:shift to right; R/L=0:shift to left.	40 μ S
Function Set	0	0	0	0	1	D	N	F	X	X			Set interface data length (DL), number of display lines (N) and character font (F).DL=1: 8 bits; DL=0: 4 bits. N=1: 2 lines; N=0: 1 lines. F=1: 5X11 dots; F=0: 5X7 dots.	40 μ S		
Set CG RAM add	0	0	0	1						ACG			Set CG RAM address. CG RAM data is sent and received after this setting.	40 μ S		
Set DD RAM Add	0	0	1							ADD			Set DD RAM address. DD RAM data is sent and received after this setting.	40 μ S		
Read BF & Addr	0	1	B							AC			Read BUSY FLAG (BF) and the contents of the address counter. BF=1: internal operation; BF=0: can accept instruction.	0 μ S		
Write Data to RAM	1	0								WRITE DATA			Write data into DDRAM or CGRAM.	40 μ S**		
Read Data from RAM	1	0								READ DATA			Read data from DDRAM or CGRAM.	40 μ S**		



## 11. SOFTWARE EXAMPLES

### 8-BIT OPERATION 8 characters X 2 lines

Function	RS RW D7 D6 D5 D4 D3 D2 D1 D0	DISPLAY	DESCRIPTION
Power on delay			Initialization. No display appears.
Function set	0 0 0 0 1 1 0 0 X X	..... .....	Sets 8-bit operation, 2-line display and 5*7 dots character font.
Display OFF	0 0 0 0 0 0 1 0 0 0		Turn off display.
Display ON	0 0 0 0 0 0 1 1 1 0		Turn on display and cursor.
Entry Mode set	0 0 0 0 0 0 0 1 1 0	..... .....	Set mode to increment the address by one and to shift the cursor to the right, at the time of write to the DD/CG RAM. Display is not shifted.
Write data to CG/DD RAM	1 0 0 1 0 0 1 1 1 1	O..... .....	Write "O". Cursor incremented by one and shift to right.
Write data to CG/DD RAM	1 0 0 1 0 1 0 0 1 0	OR..... .....	Write "R". Cursor incremented by one and shift to right
Write data to CG/DD RAM	. . . . .	ORIENT..... .....	Write "I" "E" "N" "T".
Set DDRAM address	0 0 1 1 0 0 0 0 0 0	ORIENT..... .....	Set RAM address so that the cursor is positioned at the head of the Second line
Write data to CG/DD RAM	. . . . .	ORIENT..... DS.....	Write "D" "S".
Cursor or display shift	0 0 0 0 0 1 0 0 X X	ORIENT..... DS.....	Shift only the cursor position to the left.
Write data to CG/DD RAM	. . . . .	ORIENT..... DISPLAY.....	Write "I" "S" "P" "L" "A" "Y"

## 4-bit operation (4-bits 1 line)

Function	RS RW D7 D6 D5 D4	Display	Description
power on delay			Initialization. No display appears.
Function set	0 0 0 0 1 0		Sets to 4-bit operation. In this case, operation is handled as 8-bits by initialization, and Only this instruction completes with one write.
Function set	0 0 0 0 1 0 0 0 0 0 X X		Sets 4-bit operation, 1-line display and 5*7 dot character font. (number of display lines and character fonts can not be changed hence after.)
Display ON/OFF Control	0 0 0 0 0 0 0 0 1 1 1 0		Turn on display and cursor.
Entry Mode Set	0 0 0 0 0 0 0 0 0 1 1 0		Turn on display and cursor.
Write data to CG/DD/ARM	1 0 0 1 0 0 1 0 1 1 1 1		Write "O". Cursor incremented by one and shift to right.
same as 8-bit operation			



12. Standard character pattern

b7-b4 b3-b0	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000	CG RAM (1)			0	a	P	\	P				-	9	3	o	p
0001	(2)		!	1	A	Q	a	4			e	7	7	4	3	q
0010	(3)		"	2	B	R	b	r			f	4	9	x	p	o
0011	(4)		#	3	C	S	c	s			j	o	t	e	e	o
0100	(5)		\$	4	D	T	d	t			v	i	t	t	p	o
0101	(6)		%	5	E	U	e	u			.	o	6	1	o	o
0110	(7)		&	6	F	V	f	v			o	o	=	o	p	o
0111	(8)		^	7	G	W	g	w			o	o	x	o	g	o
1000	(1)		^	8	H	X	h	x			i	o	*	o	j	o
1001	(2)		>	9	I	Y	i	y			o	o	o	o	o	o
1010	(3)		*	:	J	Z	j	z			e	o	o	o	j	o
1011	(4)		+	:	K	L	k	l			*	o	o	o	o	o
1100	(5)		,	<	L	#	l	l			o	o	o	o	o	o
1101	(6)		-	=	M	I	m	i			o	o	o	o	o	o
1110	(7)		.	>	N	^	n	^			o	o	o	o	o	o
1111	(8)		/	?	O	_	o	*			o	o	o	o	o	o

## 13. RECAUTION FOR USING LCM

### 1. LIQUID CRYSTAL DISPLAY (LCD)

LCD is made up of glass, organic sealant, organic fluid, and polymer based polarizers. The following precautions should be taken when handling,

- (1). Keep the temperature within range of use and storage. Excessive temperature and humidity could cause polarization degradation, polarizer peel off or bubble.
- (2). Do not contact the exposed polarizers with anything harder than an HB pencil lead. To clean dust off the display surface. Wipe gently with cotton. Chamois or other soft material soaked in petroleum benzin.
- (3). Wipe off saliva or water drops immediately. Contact with water over a long period of time may cause polarizer deformation or color fading, while an active LCD with water condensation on its surface will cause corrosion of ITO electrodes.
- (4). Glass can be easily chipped or cracked from rough handling, especially at corners and edges.
- (5). Do not drive LCD with DC voltage.

### 2. Liquid Crystal Display Modules

#### 2.1 Mechanical Considerations

LCM are assembled and adjusted with a high degree of precision. Avoid excessive shocks and do not make any alterations or modifications. The following should be noted.

- (1). Do not tamper in any way with the tabs on the tabs on the metal frame.
- (2). Do not modify the PCB by drilling extra holes, changing its outline, moving its components or modifying its pattern.
- (3). Do not touch the elastomer connector, especially insert an backlight panel (for example, EL).
- (4). When mounting a LCM make sure that the PCB is not under any tress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.
- (5). Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing piels.

#### 2.2. Static Electricity

LCM contains CMOS LSI's and the same precaution for such devices should apply, namely

- (1). The operator should be grounded whenever he/she comes into contact with the module. Never touch any of the conductive parts such as the LSI pads, the copper leads on the PCB and the interface terminals with any parts of the human body.
- (2). The modules should be kept in antistatic bags or other containers resistant to static for storage.
- (3). Only properly grounded soldering irons should

be used.

- (4). If an electric screwdriver is used, it should be well grounded and shielded from commutator sparks.
  - (5). The normal static prevention measures should be observed for work clothes and working benches; for the latter conductive ( rubber) mat is recommended.
  - (6). Since dry air is inductive to statics, a relative humidity of 50-60% is recommended.
- #### 2.3. Soldering
- (1). Solder only to the I/O terminals.
  - (2). Use only soldering irons with proper grounding and no leakage.
  - (3). Soldering temperature:  $280\text{ }^{\circ}\text{C} \pm 10^{\circ}\text{C}$
  - (4). Soldering time: 3 to 4 sec.
  - (5). Use eutectic solder with resin flux fill.
  - (6). If flux is used, the LCD surface should be covered to avoid flux spatters. Flux residue should be removed after wards.

#### 2.4. Operation

- (1). The viewing angle can be adjusted by varying the LCD driving voltage  $V_0$ .
- (2). Driving voltage should be kept within specified range; excess voltage shortens display life.
- (3). Response time increases with decrease in temperature.
- (4). Display may turn black or dark blue at temperatures above its operational range; this is (however not pressing on the viewing area) may cause the segments to appear "fractured".
- (5). Mechanical disturbance during operation (such as pressing on the viewing area) may cause the segments to appear "fractured".

#### 2.5. Storage

If any fluid leaks out of a damaged glass cell, wash off any human part that comes into contact with soap and water. Never swallow the fluid. The toxicity is extremely low but caution should be exercised at all the time.

#### 2.6. Limited Warranty

Unless otherwise agreed between EASTERNTRONIC and customer, EASTERNTRONIC will replace or repair any of its LCD and LC, which is found to be defective electrically and visually when inspected in accordance with EASTERNTRONIC acceptance standards, for a period on one year from data of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of EASTERNTRONIC is limited to repair and/or replacement on the terms set forth above. EASTERNTRONIC will not responsible for any subsequent or consequential events.



## 14. Declaration of conformity regarding the limitation of dangerous substances

**深圳易事通液晶显示模块有限公司****SHENZHEN EASTERNTRONIC LCM CO., LTD.**

4F , B3 Building , FuYuan Industrial Zone , FuYong Town,

BaoAn District, ShenZhen, P.R. China

**DECLARATION OF CONFORMITY REGARDING THE LIMITATION OF DANGEROUS SUBSTANCES**

WE , SHENZHEN EASTERNTRONIC LCM CO ., LTD,

Declare that the product of CS0802C-D-BSXTSWN-101 complies with:  
The directive 2002/95/EC Dated 2003/01/27 regarding the limitation of dangerous substances, in particular to clause 4 which forbids the use of the following elements:

- Lead
- Mercury
- Cadmium
- Hexavalent chromium
- Polybrominated biphenyls
- Polybrominated diphenylethers

And to the annex which points out the exempted implementations

To the directive 73/23/eec dated 1973/02/19 and the standard EN60335-1 regarding prohibition of following elements:

- Oils containing polychlorinated biphenyl
- Asbestos
- Radioactive substances

Name: Ewing Lau /

SHENZHEN EASTERNTRONIC LCM CO ., LTD.

Issued on March 3, 2008

According with the proposal of Technical Adaption Committee (TAC) of a limit of 0.1% by weight for lead hexavalent chromium, mercury, PBBs and PBDRs and 0.01% by weight for Cadmium.