

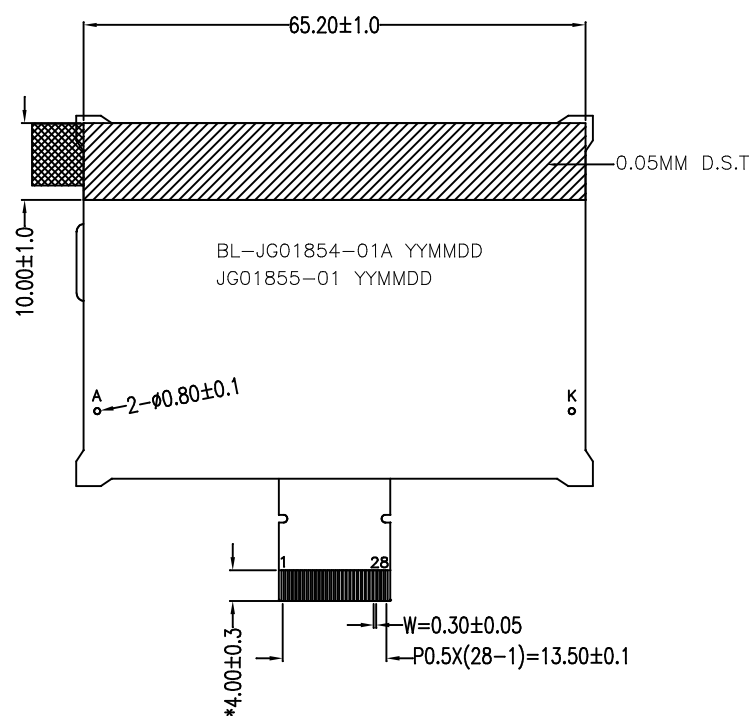
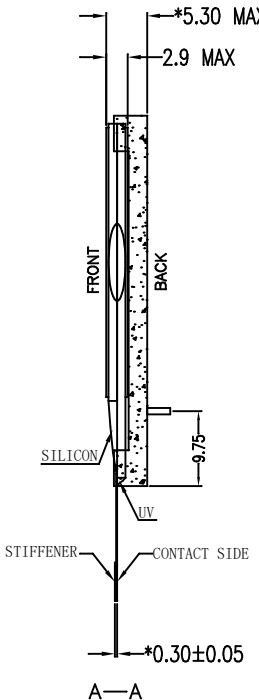
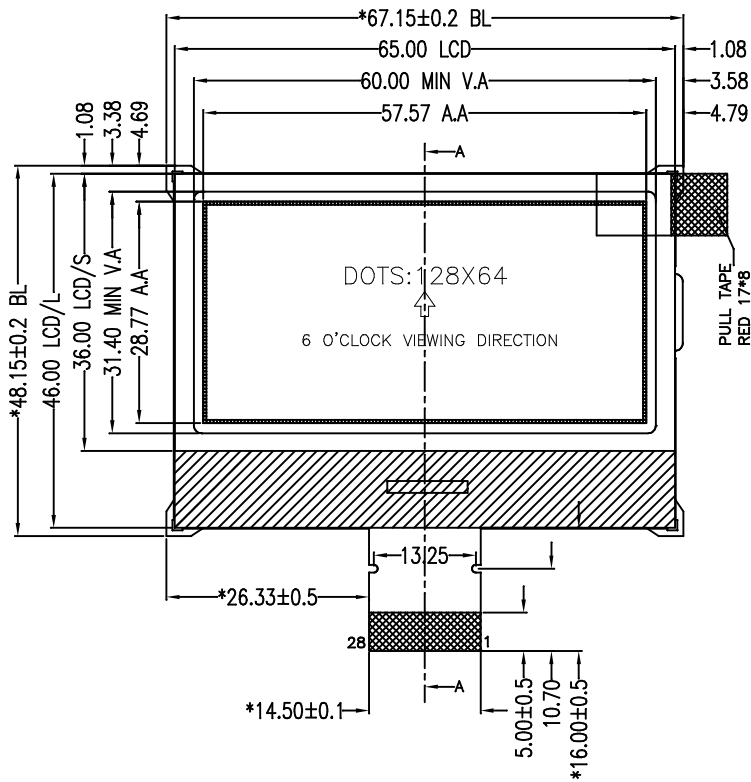




REV.	SYMBOL	DESCRIPTION	NAME	DATE
△	00	INITIAL	ZX	2024-5-24



PIN FUNCTION	
PIN	SYMBOL
1	/CS
2	/RES
3	RS
4	WR(/RW)
5	RD(/RD)
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VDD
15	VSS
16	NC
17	NC
18	NC
19	NC
20	NC
21	V0
22	XV0
23	NC
24	NC
25	NC
26	NC
27	VG
28	P/S

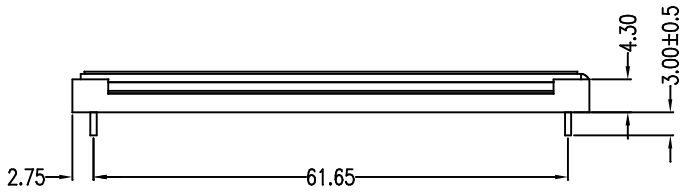

请客户确认图纸!
 确认签名: 2024-06-04

FOR APPROVAL
McTRONIC
 Micetro
 MC Tronic s.r.l. - società unipersonale
 Via Novara, 35
 28010 VAPRIO D'AGOGGINA (NO)
 V.A.T. code 0224850032
 Tel. +39 0323 86931 - Fax +39 0323 86932
 Email: info@mc-tronic.it
 R.E.A. NO N. 224576

ITEM	PARAMETERS	ITEM	PARAMETERS	UNMARKED TOLERANCE: ± 0.2			
DISPLAY TYPE	FFSTN/NEGATIVE	VIEWING DIRECTION	6 O'CLOCK	SCALE	FIT	UNIT	MM
POLARIZER TYPE	TRANSMISSIVE	OPERATING TEMPERATURE	-20°C TO +70°C	SHEET	1 OF 1	REV.	00
DRIVING METHOD	1/65 DUTY, 1/9 BIAS	STORAGE TEMPERATURE	-30°C TO +80°C	TITLE		COUNTER DRAWING	
LCD OPERATING VOLTAGE	8.3 V	IC	ST7567	PART NO.		DRAWN	ZHONGXIN 2024-5-24
BACKLIGHT	WHITE,5LED,Vf4V,75mA(TYP)	LOGIC VOLTAGE(VDD)	3.3V	MODULE NO.	JG01855-01	CHECKED	ZHAOJIA 2024-5-24
RoHS COMPLIANT		CONNECTING METHOD	FPC	CUSTOMER NO.	DS11005549	APPROVED	HUANGYONG 2024-5-24
DIMENSIONS WITH MARK "*" ARE IMPORTANT, WITH MARK "()" ARE REFERENCED, WITH MARK "◇" ARE SPECIAL CHARACTERISTICS, WITH MARK "◊" ARE IMPROTANT CHARACTERISTICS.				THIS DRAWING IS PROPERTY OF JENSON DISPLAY CO. LIMITED, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.			

JENSON DISPLAY Hunan Jenson Display Technology Company Limited