
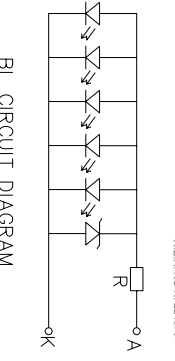



PIN	Description
1	/CS
2	/RES
3	RS
4	WR(/WR)
5	RD(/RD)
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VDD
15	VSS
16	NC
17	NC
18	NC
19	NC
20	NC
21	V0
22	XV0
23	NC
24	NC
25	NC
26	NC
27	VG
28	P/S

- NOTE:
1. GENERAL TOLERANCE:  $\pm 0.20$ .
  2. (...) IS REFERENCE DIMENSION.
  3. \* CRITICAL DIMENSION
  4. Backlight lifetime at 25°C (If < 75 mA) min 50K hrs
  5. Backlight luminance is 65cd/m<sup>2</sup> typ (@75mA)
  6. ROHS COMPLIANT



MC Tronic s.r.l. Via S. Felice 10  
 20020 VARESE (VA) ITALIA  
 Tel. +39 0323 869311 - Fax +39 0323 869322  
 E-mail: info@mc-elt.com  
 P.IVA NO. 025491903

FOR APPROVAL  
**McTRONIC**  
 2024-06-07

" Not to use the substances and their applications of SUCCESS Management Standard for Environment-related Substances to be Controlled"

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	TITLE	DRAWING NO.
01		Modify the polarizer based on S69507A.	Duke	2024.06.06		MODULE SPEC.	STR-S69507C-DD025MB
						BOM NO.: BM141201-01A	3rd Angle
							mm
							SCALE
							FIT
							SHEET 1 OF 1

Display Type	DFSTN
Front Polarizer	NEGATIVE
Z Size Compensate	TRANSMISSIVE
Viewing Method	1/65 DUTY/1/9 BIAS
LCD Driver IC	ST7567
Interface	6800/SPI
Operating Voltage	Vop=8.3V
Driver Voltage	VDD=3.3V
Operation Temperature	-20°C TO +70°C
Storage Temperature	-30°C TO +80°C
Connect Method	FPC
Backlight	White V <sub>max</sub> =4V, I <sub>max</sub> =5mA, V <sub>op</sub> @ <sub>70</sub> =25°C

**SUCCESS ELECTRONICS LTD**