

# YETDA INDUSTRY LTD.

## Technical Data Sheet

MODEL NO : Q022YG4-2

### Features :

- Compatible with reflow solder process
- Compatible with automatic placement equipment
- For BackLight Use LED Lamps


### Applications :

- Indicators
- Automotive : backlighting in dashboard and switch
- Backlight for LCD

Dice material	Emitted color	Lens Color
AlGaInP/GaAs	Green	Water Clear

### Electrical/Optical Characteristics(Ta=25°C)

Parameter	Test Condition	Symbol	Value			Unit
			Min	Typ	Max	
Spectral half bandwidth	I <sub>F</sub> =20mA	$\Delta \lambda$		16		nm
Dominant wavelength	I <sub>F</sub> =20mA	$\lambda_D$	565	570	575	nm
Forward voltage	I <sub>F</sub> =20mA	V <sub>F</sub>	3.5	4.0	5.0	V
Luminous intensity	I <sub>F</sub> =20mA	I <sub>v</sub>	40	60	100	mcd
Viewing angle at 50% I <sub>v</sub>	I <sub>F</sub> =10mA	2 $\theta$ 1/2		120		Deg
Reverse current	V <sub>R</sub> =5V	I <sub>R</sub>			10	$\mu$ A




YETDA INDUSTRY LTD.

13NOV21W


**Absolute Maximum Ratings(Ta=25°C)**

Parameter	Symbol	Value	Unit
Power dissipation	Pd	150	mW
Forward current	I <sub>F</sub>	30	mA
Reverse voltage	V <sub>R</sub>	5	V
Operating temperature range	Top	-40 ~+80	°C
Storage temperature range	Tstg	-40 ~+85	°C
Peak pulsing current (1/8 duty f=1kHz)	I <sub>FP</sub>	125	mA

**PACKAGING DIMENSIONS (mm):**



YETDA INDUSTRY LTD.

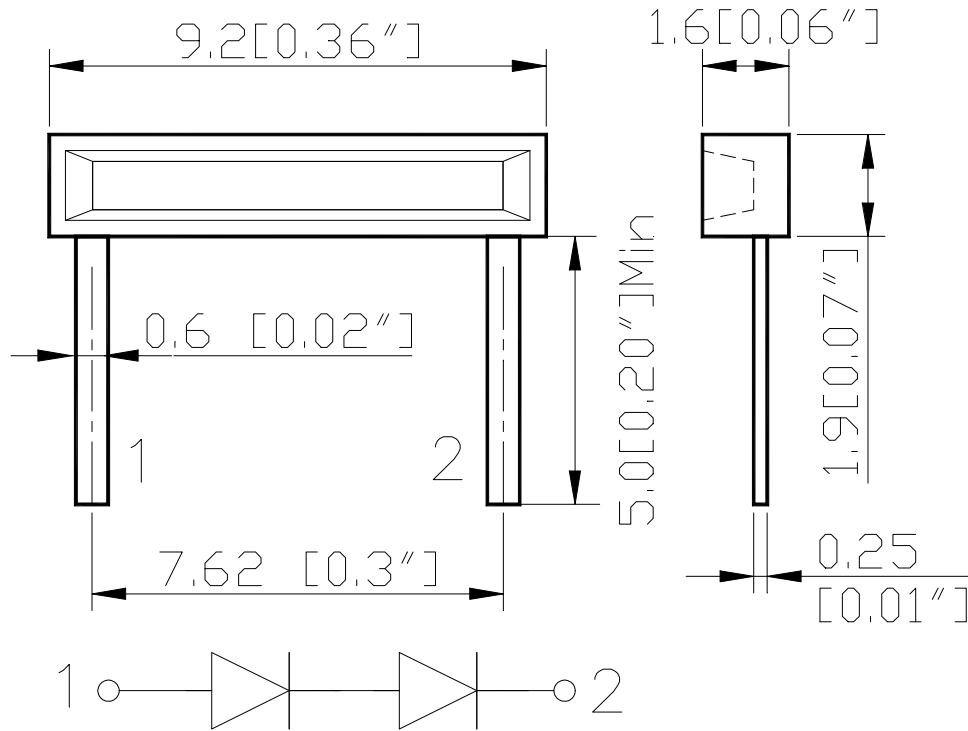


### Precautions For Use :

#### Over - current - proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen )

#### Storage

1. The operation of temperature and R.H. are :  $5^{\circ}\text{C} \sim 30^{\circ}\text{C}$  , 60%R.H. Max.
2. Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a dampproof box with desiccating reagent. Considering the tape life, we suggest our customers to use our products within 1.5 year ( from production date ) .
3. It's recommended to bake before soldering when the package is unsealed after 72 hrs. The condition is :  $60^{\circ}\text{C} \pm 5^{\circ}\text{C}$  for 15hrs.



# YETDA INDUSTRY LTD.

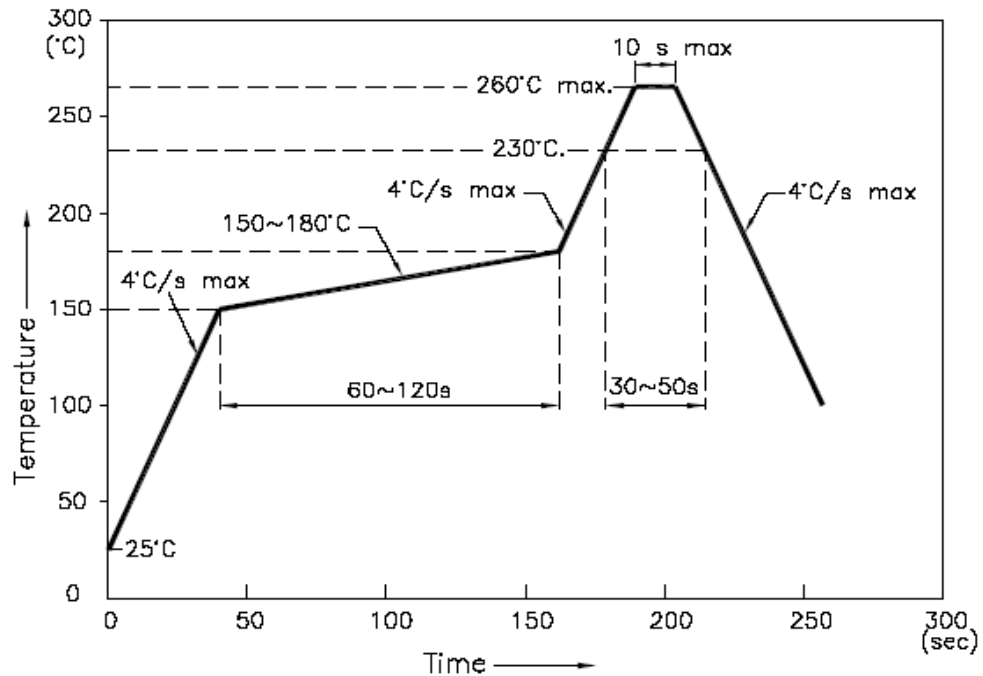

## NOTES:


1. We recommend the reflow temperature  $245^{\circ}\text{C}(\pm 5^{\circ}\text{C})$ . the maximum soldering temperature should be limited to  $260^{\circ}\text{C}$ .
2. dont cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

### ■Soldering iron


Basic spec is  $\leq 5\text{sec}$  when  $260^{\circ}\text{C}$ . If temperature is higher, time should be shorter ( $+10^{\circ}\text{C} \rightarrow -1\text{sec}$ ). Power dissipation of iron should be smaller than 20W, and temperatures should be controllable. Surface temperature of the device should be under  $230^{\circ}\text{C}$ .

### ■Rework

1. Customer must finish rework within 5 sec under  $260^{\circ}\text{C}$ .
2. The head of iron can not touch copper foil
3. Twin-head type is preferred.



YETDA INDUSTRY LTD.

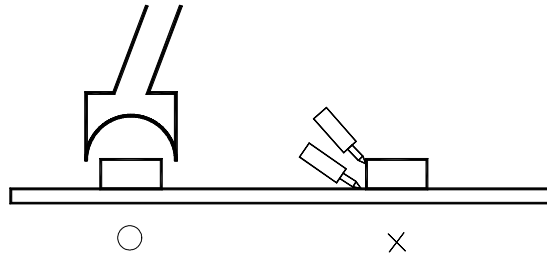

- Avoid rubbing or scraping the resin by any object, during high temperature, for example reflow 、 solder etc.