



Approved

99.12.07

eTurboTouch  
R&D Dept.

Rev 1	10,13'04	First release
Rev 2	07,01'08	Modify Barcode location
Rev 3	12,06'10	Add Kapton tape

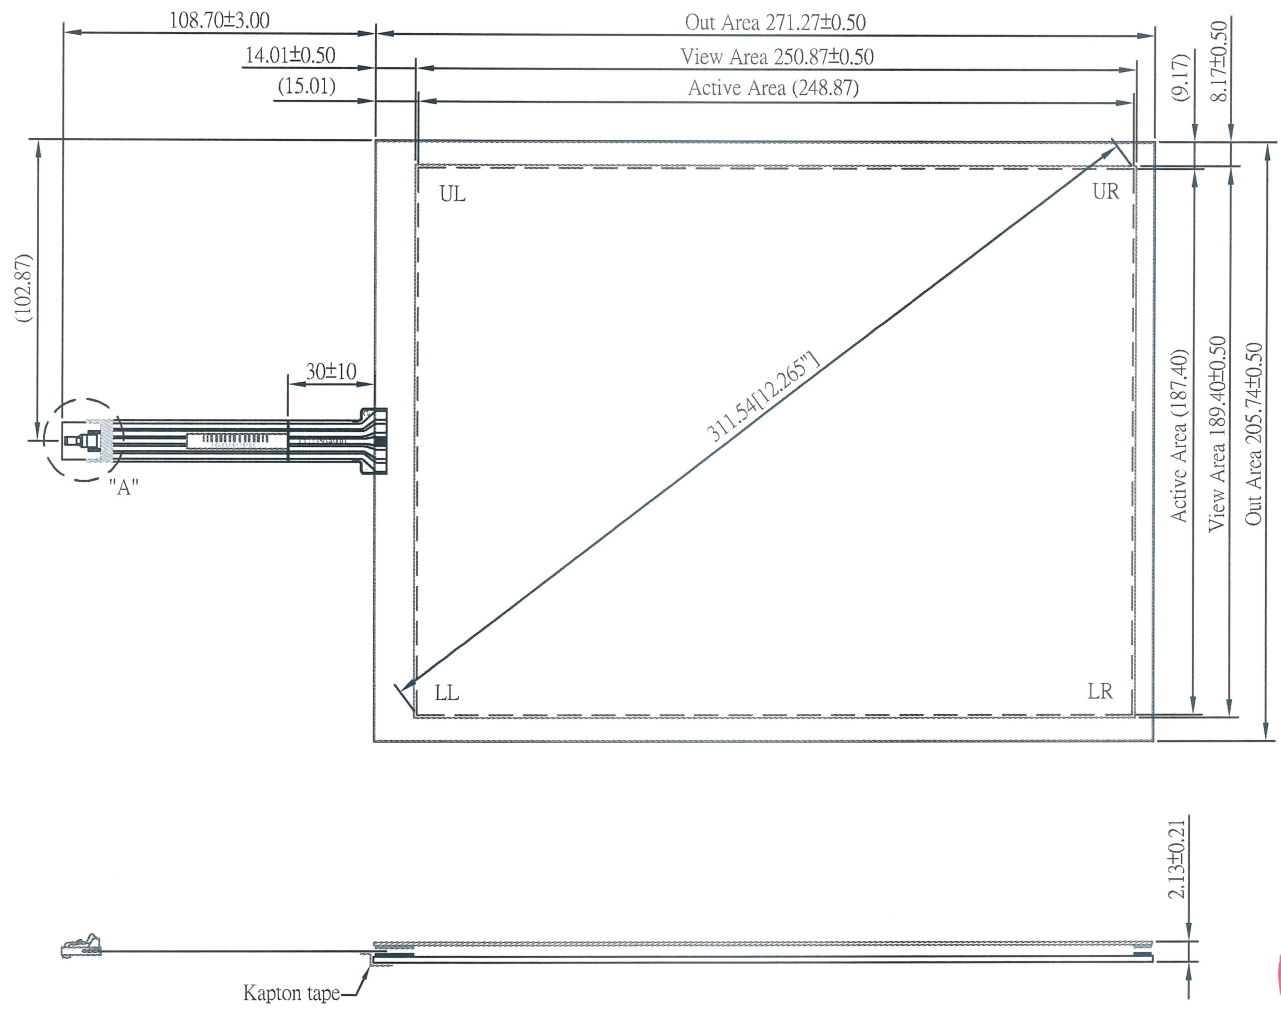

Pin Out	
1	UR
2	UL
3	SENSE
4	LL
5	LR



- NOTES:
1. TOPSHEET HARDCOAT IS ANTI-GLARE
  2. GLASS THICKNESS 1.8mm
  3. FLEXTAIL DO NOT BEND TO LESS THAN 3.175mm RADIUS
  4. OVERALL SENSOR THICKNESS IS 2.13±0.21mm
  5. SENSOR INPUT BY PEN / FINGER

6. 5 PIN AMP CONNECTOR, LATCH STYLE HOUSING P/N:487526-4 OR EQUIVALENT

RoHS

THIRD ANGLE PROJECTION		Dimensions	m/m
Drawn by	Stella Tu	Scale	FREE
Checked by	Orly Lin	Release Date	12,06'10

eTurboTouch

Drawing Number S5-121E18P5L3AS1